


Roller blind dimensions for fabrics under 230 g/m					Roller blind dimensions for fabrics over 230 g/m					System colour		
Operation type	MIN	MAX	M A X	m ²	Operation type	MIN	MAX	M A X	m ²	(K)		
Chain	50	400	420	16	Chain	50	400	380	10,0		white	anod.
Motor	55	400	420	16	Motor	55	400	380	12,0			

Tube ø80 > 300 cm width

Tube ø80 > 280 cm width

The standard includes a roller blind: in a white headbox (K), plastic chain operation.


Headbox




Brackets



Weight bar



Roller blind size

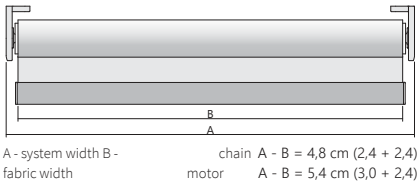

Side guidance




Roller blind with a steel cable.

Bottom cable fixing



Guide rails

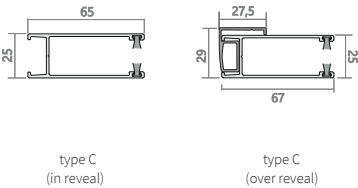

Tubular motors	T [Nm]	rpm	weight [kg]/min. width		control	supply
Torro AM35	6	28	13	55	wired	0,49 A 230 V
Torro AM35E RF	6	28	13	65	radio	0,49 A 230 V
Torro AM35QMEL RF	6	28	13	56	radio	0,49 A 230 V
Torro AM35EB RF	6	18	13	85	radio	1,5 A 16,8 V

Power options - see "Additional accessories".

Drive

Tubular motors	T [Nm]	rpm	weight [kg]/min. width		control	supply
Somfy Sonesse 40	6	20	13	57	wired	0,55 A 230 V
Somfy Sonesse 40 RTS	6	20	13	61	radio	0,55 A 230 V
Somfy Screen Up	4,5	30	10	55	wired	0,52 A 230 V

metal chain
side guidance - type E floor cable fixing (pair) side guidance - type F wall cable fixing (pair) side guidance - type J floor cable fixing (pair) side guidance - type K wall cable fixing (pair)

