


Roller blind dimensions for fabrics under 230 g/m					Roller blind dimensions for fabrics over 230 g/m					System colour			
Operation type	MIN	MAX	M A X	m²	Operation type	MIN	MAX	M A X	m²				
Chain ⌀42/⌀50	50	300	350	7,5	Chain ⌀42/⌀50	50	300	320	6,0				
DC motor ⌀38/⌀42*/⌀50*	46	220/300*	350	9,0	DC motor ⌀38/⌀42*/⌀50*	46	220/300*	320	9,0	white	anod.	black	
AC motor ⌀42/⌀50	54	300	350	9,0	AC motor ⌀42/⌀50	54	300	320	9,0				


* Torro AM35EB RF only

The standard includes a roller blind in a white type A or B headbox, with plastic chain operation.

Dimensions

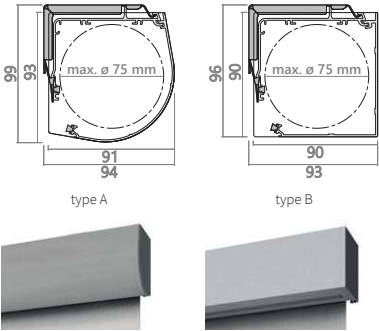


Roller blind size

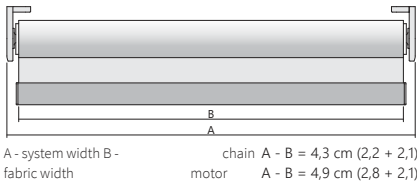


Brackets



Weight bar



Guide rails

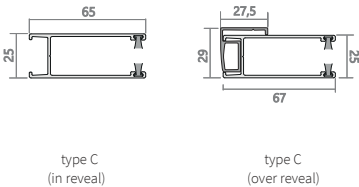


Side guidance




Bottom cable fixing



Duo-Link

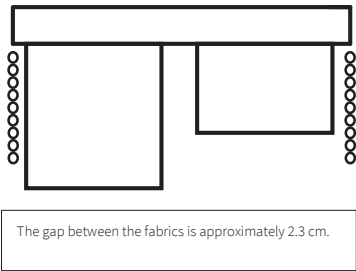



Multi-Link

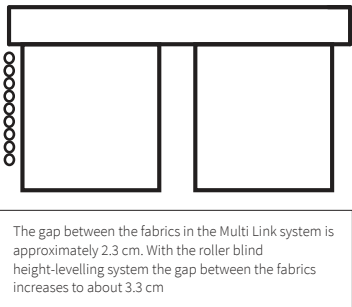

Permissible roller blind dimensions in the Multi-Link option

Operation type	fabric under 230 g/m				fabric over 230 g/m			
	2 roller blinds		3 roller blinds		2 roller blinds		3 roller blinds	
	MAX	m²	MAX	m²	MAX	m²	MAX	m²
Chain	550	7,5	580	9,0	500	6,5	580	7,0
DC motor	440	12,0	580	19,0	400	12,0	580	10,0
AC motor	580	15,0	580	23,0	580	12,0	580	12,0

* Larger blind dimensions are possible after consultation.

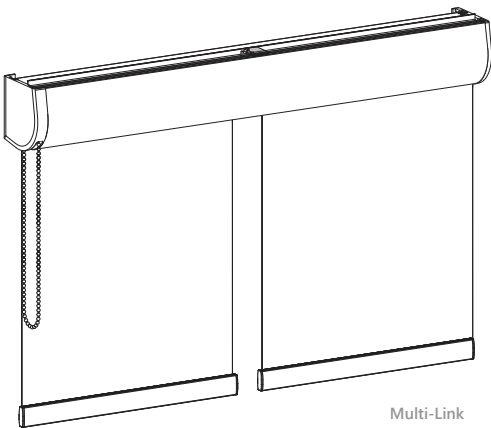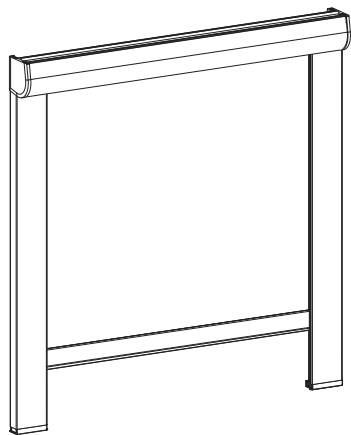

AC drive

Type	T [Nm]	rpm	weight [kg]	min. width	control	supply
Torro AM35	6	28	21	55	wired	0,49 A 230 V
Torro AM35E RF	6	28	21	65	radio	0,49 A 230 V
Torro AM35QMEL RF	6	28	21	56	radio	0,38 A 230 V
Somfy Sonesse 40	3	30	11	54	wired	0,55 A 230 V
Somfy Sonesse 40 RTS	3	30	11	58	radio	0,55 A 230 V
Somfy Screen Up	4,5	30	16	55	wired	0,52 A 230 V

DC drive

Type	T [Nm]	rpm	weight [kg]	min. width	control	supply
* Torro AM35EB RF	6	18	21	85	radio	1,5 A 16,8 V
Somfy Sonesse 30 RTS	2	25	9	46	radio	0,8 A 24 V
* Somfy Sonesse 30 WF RTS	2	28	9	69	radio	1,5 A 12 V

* Power options - see "Additional accessories".



metal chain
side guidance - type E floor cable fixing (pair) side guidance - type F
wall cable fixing (pair) side guidance - type J floor cable fixing (pair)
side guidance - type K wall cable fixing (pair)

