

Type	Minimum dimensions		Maximum dimensions Option 1		Maximum dimensions Option 2		fabrics	System colours				Fitting	
	(W)	(H)	(W)	(H)	(W)	(H)							
	MIN	MAX	MAX	MAX	MAX	MAX							
PV1	20	20	150	150	120	220							
PV2	20	20	120	160									

NEW

VERSION

4

YEARS

WARRANTY

The new version has metal cord bushings. This change improves cord durability and makes the pleated blind easier to use.

- 

The standard includes a type PV1 pleated blind with 15 mm or 18 mm profiles in white, brown, cream or anthracite with a type A handle.
- 

Above 120 cm width the 18 mm profile is used.

Above 130 cm width a centre catch is recommended. With side guidance (steel cable) only the 18 mm profile is used. Type PV2 is intended for roof windows. Above 80 cm width side guidance is recommended.

Guide rails in type PV2 are available only in cream or anod.
- 

No-drill holders can be used.



RAL



white



brown
RAL 8028



anthracite
RAL 7016



anod.



black



cream
RAL 1014



bog oak



golden oak



walnut





mahogany





winchester



pine

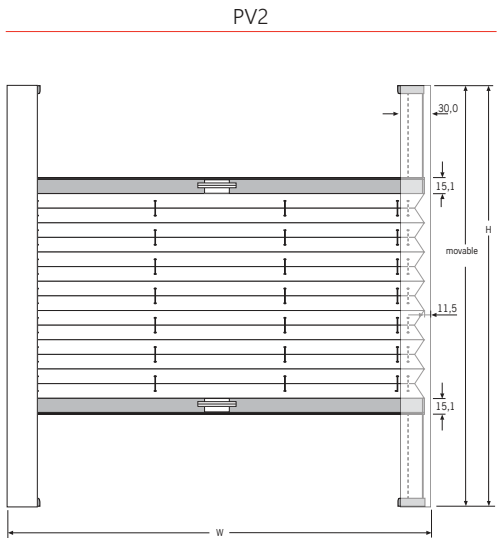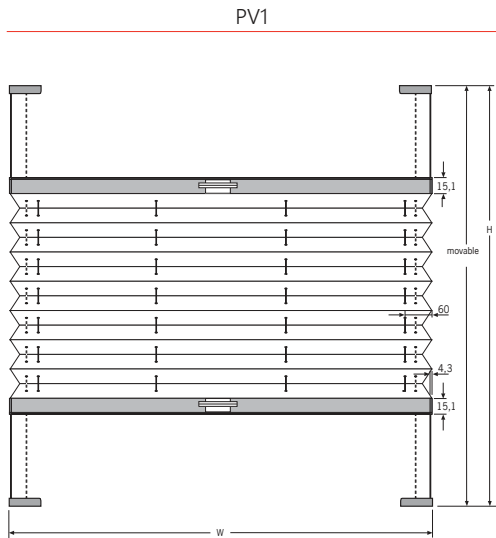

Blind height / stack height			
PV1		PV2	
			
50 cm	5 cm	50 cm	5 cm
100 cm	6 cm	100 cm	6 cm
150 cm	7 cm	150 cm	7 cm
200 cm	8 cm	200 cm	8 cm
220 cm	9 cm	220 cm	9 cm

Profiles	
	
15 mm	18 mm

Operating handle



Suits only the type B profile holder.

System colour	
profile	plastic parts
white	white
brown	brown
anthracite	anthracite
anod.	grey
black	black
cream	cream
bog oak	brown
golden oak	oak
walnut	brown
mahogany	brown
winchester	oak

Profile handle




type A




type B

Cord fixing




15 mm



18 mm

Guide rails





Fitting



type A - glass width
(standard)



type B - fitting on
surface



type C - fitting without
drilling



type D - fitting without
drilling



type E - fitting without
drilling



type F - fitting without
drilling
(white only)



additional profile handle (2 pcs.) side
guidance steel cable surface fitting type B

no-drill fitting type C no-drill
fitting type D, E no-drill fitting
type F fitting type G

handle (0-100cm)
handle (100-200cm)

