

Fabrics

Slat Colours

Construction Colours



TABLE OF CONTENTS

AWNING FABRICS.....	5
SOLID ACRYLIC FABRICS.....	8
WATERPROOF ACRYLIC FABRICS.....	15
ORCHESTRA ACRYLIC FABRICS.....	16
URBAN ACRYLIC FABRICS.....	17
LANDSCAPE MINI ACRYLIC FABRICS	18
LANDSCAPE ACRYLIC FABRICS	18
CLASSICAL ACRYLIC FABRICS.....	20
FANTASY ACRYLIC FABRICS	21
SCREEN FABRICS	27
SERGE 600.....	30
SERGE 1%.....	32
SERGE 600 BO LUNAR.....	33
POLYSCREEN® 550.....	34
POLYSCREEN® 550 GOLD & SILVER	35
POLYSCREEN® 350.....	36
POLYSCREEN® LUMINOUS.....	37
POLYSCREEN® 550 COUPAGE	38
POLYSCREEN® 314 BLACK OUT	39
SUNWORKER.....	40
SOLTIS® 92.....	41
SOLTIS® 99.....	42
VEROGLIM ACOUSTIC	43
PERGOLA SOLID FABRICS	44
SELT COLOURS.....	46
SLAT COLOURS.....	48
CONSTRUCTION COLOURS	50



AWNING FABRICS



100%
ACRYLIC



Above pictograms apply to acrylic fabrics.

ACRYLIC FABRICS

Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante	ACRYLIC	
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinn düsengefärbt Acrylique, 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 300 g/m²
Width Warenbreite Laize	DIN EN 1773	120 cm
Colour fastness Farbechtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Light fastness	DIN EN ISO 105-B04	7-8/8
Oil repellency Ölabweisung Oléofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 330 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaine	EN ISO 13937-2	2.3 / 4

Acrylic fabrics guarantee the highest quality of the product, providing thermal comfort and protection against UV radiation. Made 100% out of acrylic fibre, dyed in chemical solution, provide excellent protection against colour loss. UV resistance coefficient is 7-8 at 8° scale. Impregnation with use of TEFLON® or SCOTCHGARD™ agents provides an excellent protective barrier and strengthens water-repellent qualities of the fabric, also preventing dirt adhering. Resistance to leaking: 330 mm water column. The advantage of acrylic fabric is also high resistance to tensile and tear.

WATERPROOF FABRICS



Technical data shown below are average values of the current production Die angegebenen technischen Daten sind Durchschnittswerte der laufenden Produktion Les données techniques ci-dessous sont des valeurs moyennes de la production courante	ACRYLIC WATERPROOF	
Fabric Gewebe Tissu		Acrylic 100%, solution dyed Acryl 100%, spinndüsengefärbt Acrylique 100% teint masse
Finishing Ausrüstung Traitement		Teflon - Cleangard
Weight Gewicht Poids total	DIN EN 12127	~ 330 g/m ²
Width Warenbreite Laize	DIN EN 1773	120 cm
Colour fastness Farbechtheit Solidité des coloris	DIN EN ISO 105-B02	7-8 / 8
Light fastness	DIN EN ISO 105-B04	7-8/8
Oil repellency Ölabweisung Oléofugation	EN ISO 14419	4-5
Water repellency Wasserabweisung Résistance au mouillage superficiel	EN ISO 4920	100
Water column Wassersäule Colonne d'eau	EN 20 811	~ 1000 mm
Tensile strength (daN/5 cm) Höchstzugkraft (daN/5 cm) Résistance à la rupture (daN/5 cm)	DIN EN ISO 13934-1	~ 140 / 95
Tear resistance (daN) Weft/Warp Weiterreißkraft (daN) Schuss/Kette Résistance à la déchirure (daN) Trame/Chaîne	EN ISO 13937-2	3 / 4

Waterproof acrylic fabrics are characterized by increased resistance to leaking - about 1000 mm water column. Weave structure together with modern impregnation technology provides high air permeability even on hot days. Oeko-Tex® guarantees that offered acrylic fabrics, subjected to special impregnation for water resistance, are not toxic.

SOLID

ACRYLIC FABRICS

BLANCO



2042

UV: 97%

G_{TOT}: 18%

TANDEM BLANCO




8442

UV: 40%

G_{TOT}: 18%

NATURAL

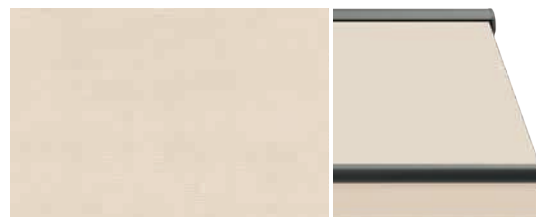


2929

UV: 97%

G_{TOT}: 18%

MARFIL

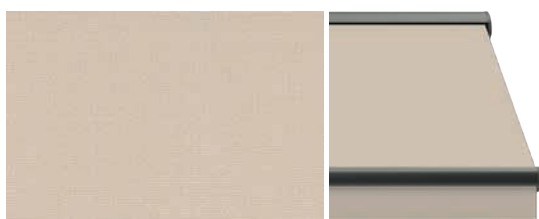


2143

UV: 97%

G_{TOT}: 16%

SIROCO

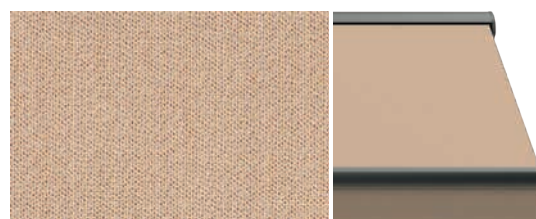


2226

UV: 98%

G_{TOT}: 12%

VANILLA

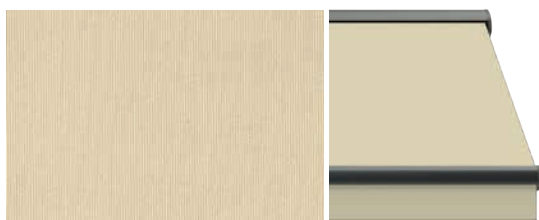


2687

UV: 97%

G_{TOT}: 17%

AMBER BEIGE

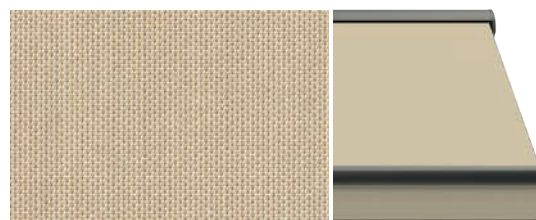


0814

UV: 99%

G_{TOT}: 15.66%

BEIGE

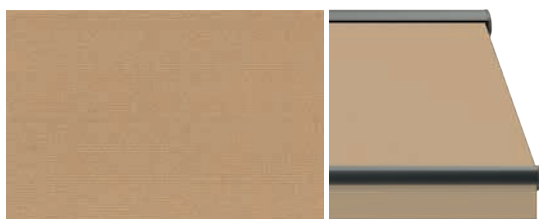


2038

UV: 99%

G_{TOT}: 11%

INTEGRAL

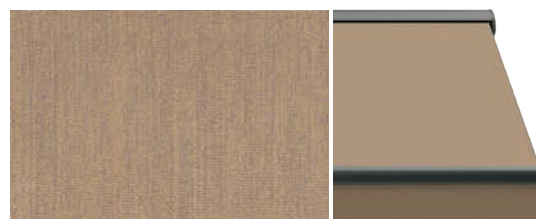

2838

UV: 99%

G_{TOT}: 8%

BERNA



2041

UV: 97%

GTOT: 16%

MULTICO FLAME*



7131

UV: 90%

GTOT: 17%

*Until stock lasts

NUAGES FLAME*




6319

UV: 90%

GTOT: 16%

*Until stock lasts

AVENA

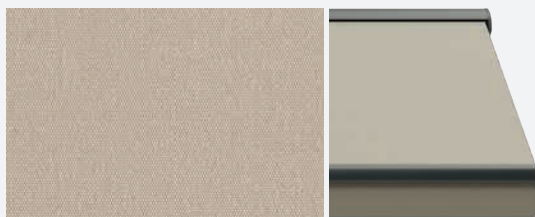


2296

UV: 98%

GTOT: 11%

LIN MELANGE

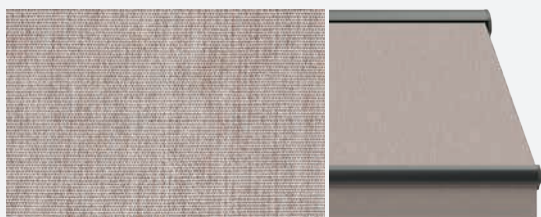


8904

UV: 95%

GTOT: 11%

TWEED BROWN

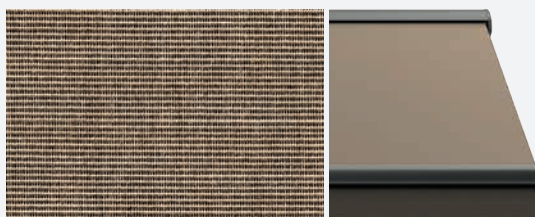


0403

UV: 99%

GTOT: 6.82%

MINERAL

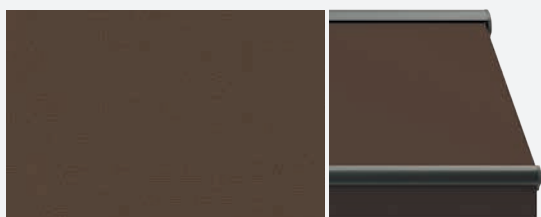


2831

UV: 99%

GTOT: 7%

VISION

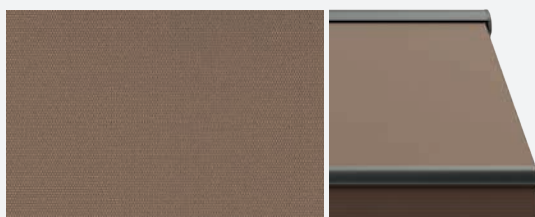


2250

UV: 99%

GTOT: 7%

CHAUME PIGUE

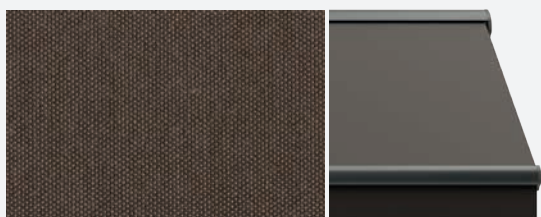


U235

UV: 100%

GTOT: 9%

CAFE

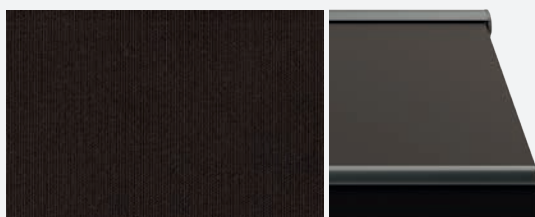

2316

UV: 99%

GTOT: 5%

MARBLE



0923 UV: 99% GTOT: 12.8%

TWEED LATTE



7926 UV: 98% GTOT: 15%

SNOWFLAKE




3463 UV: 95% GTOT: 22%

TWEED ARGENT




0794 UV: 98% GTOT: 19%

DARK LINEN

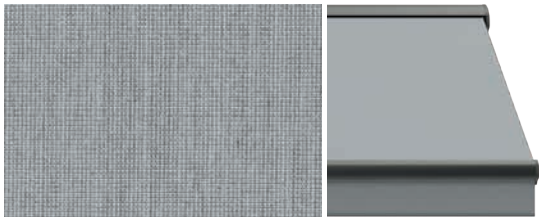


6727 UV: 98% GTOT: 18%

SILVER WHITE

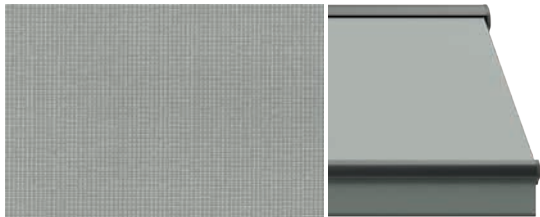

0364 UV: 99% GTOT: 7.67%

SILVER MELANGE

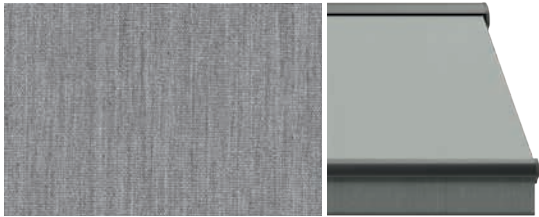

0028 UV: 99% GTOT: 7.36%

TANDEM PIEDRA




8445 UV: 80% GTOT: 7%

IRON




0937 UV: 99% GTOT: 6.57%

TWEED ROCK

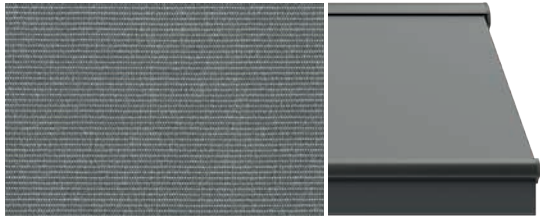

7151 UV: 98% GTOT: 11%

SILVER

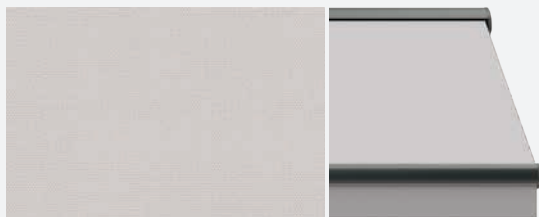


2821

UV: 97%

GTOT: 13%

SILVER GREY

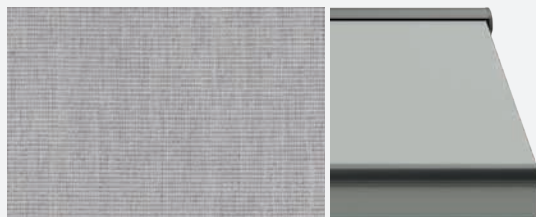


U190

UV: 90%

GTOT: 15%

ZIP GREY

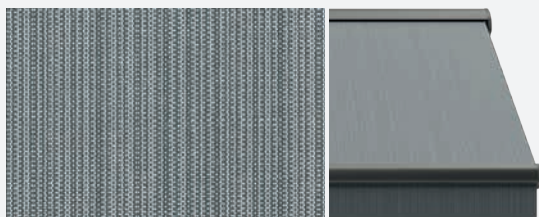

1597

UV: 98%

GTOT: 13%

ZINC




2802

UV: 99%

GTOT: 11%

PIETRA BEIGE

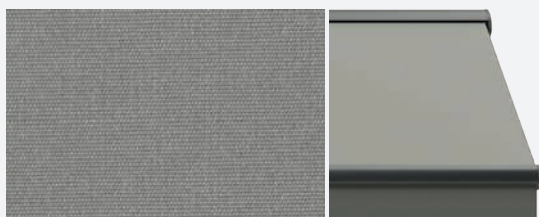


9415

UV: 98%

GTOT: 8%

PERLA

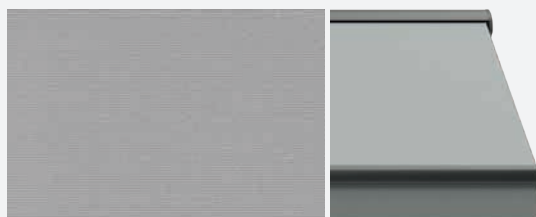


2979

UV: 97%

GTOT: 8%

ASH

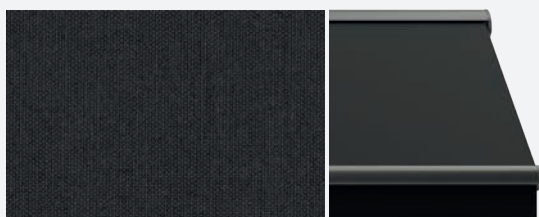


0638

UV: 99%

GTOT: 5.05%

ANTRACITA

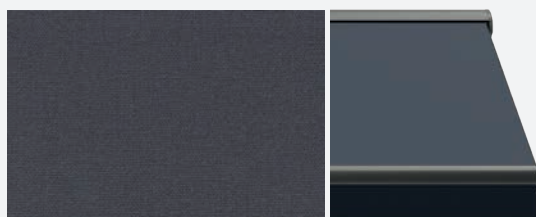


8488

UV: 99%

GTOT: 6%

TANDEM GRAFITO

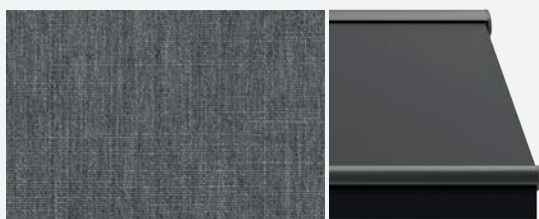

8446

UV: 80%

GTOT: 6%

EBONY TWEED




7324

UV: 98%


GTOT: 10%

NEGRO

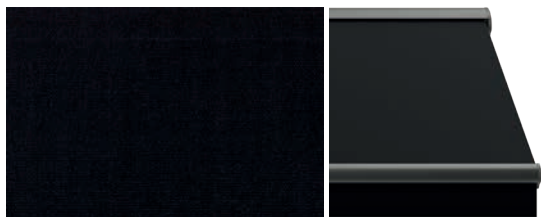

2170 UV: 99% GTOT: 5%

GRAPHITE ZIP

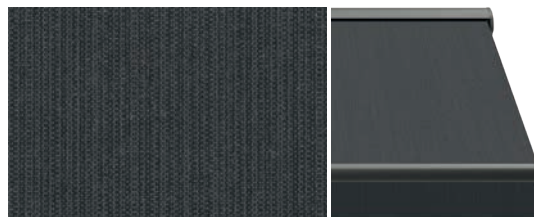


1524 UV: 98% GTOT: 12%

BASALT




8203 UV: 100% GTOT: 5%

FLANELLE

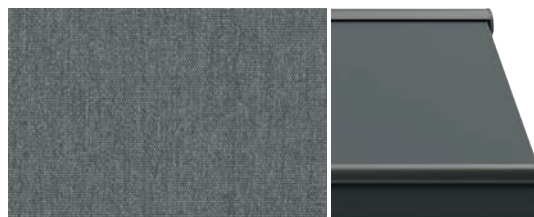


U104 UV: 100% GTOT: 5%

CHARCOAL TWEED

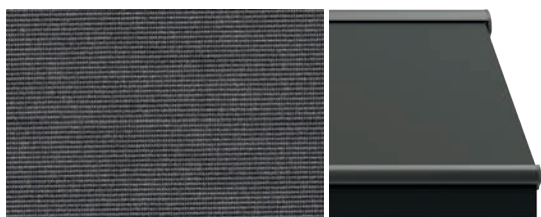


0402 UV: 99% GTOT: 5%

STITCH ANDESITE

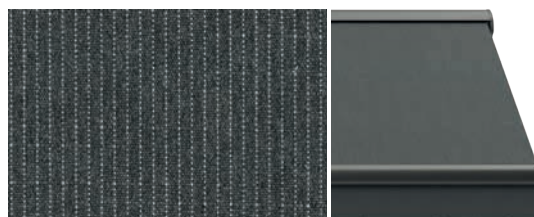


0512 UV: 98% GTOT: 8%

STITCH CALCITE

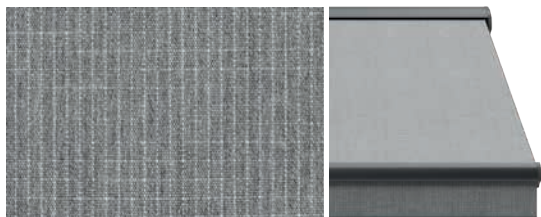

0505 UV: 98% GTOT: 9%

STITCH RUBY

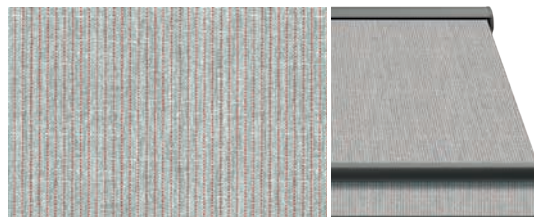

0507 UV: 98% GTOT: 9%

WHITE LINEN




8615 UV: 95% GTOT: 18%

PLATINUM



0715 UV: 90% GTOT: 12%

BREEZE

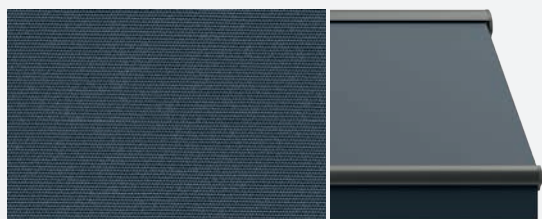


2777

UV: 99%

GTOT: 6%

MARINE

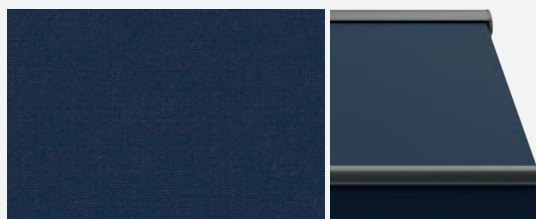


2145

UV: 99%

GTOT: 5%

AZUL

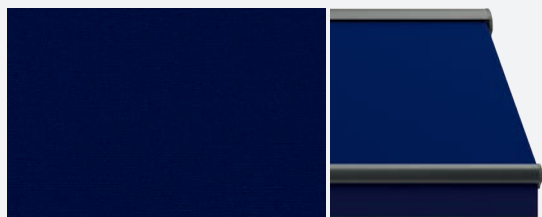


2018

UV: 99%

GTOT: 7%

ORANGE

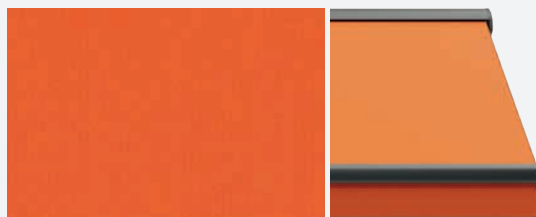


2050

UV: 99%

GTOT: 13%

BRIGHT RED

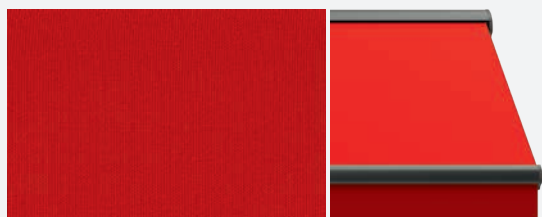


2211

UV: 99%

GTOT: 10%

PIMENT FIGUE*

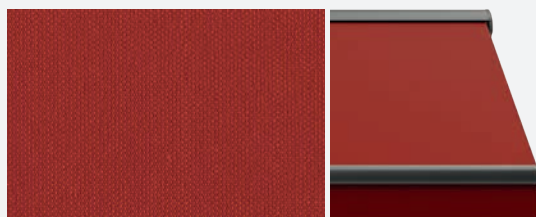


U412

UV: 100%

GTOT: 10%

*Until stock lasts

RIOJA

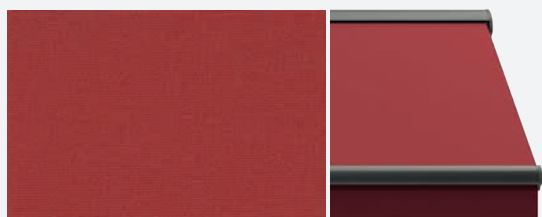


2210

UV: 99%

GTOT: 8%

CARMIN FIGUE

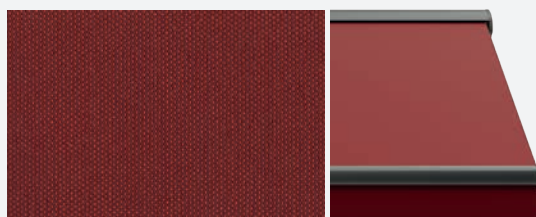


U411

UV: 100%

GTOT: 10%

GRANATE

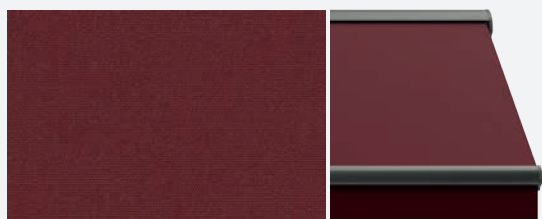


2101

UV: 99%

GTOT: 6%

SWITCH ROGUE*

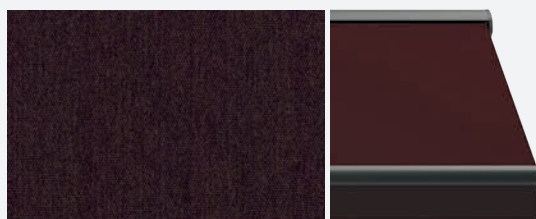


U390

UV: 100%

GTOT: 8%

*Until stock lasts

MARSEILLE FLAME*

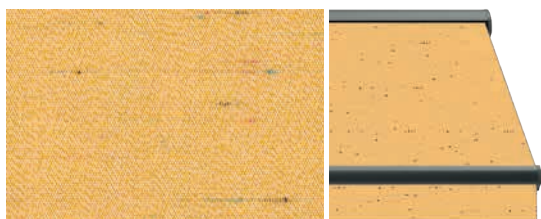

8854

UV: 100%

GTOT: 11%

*Until stock lasts

AMARILLO




2013

UV: 99%

GTOT: 15%

TWEED SENAPE*

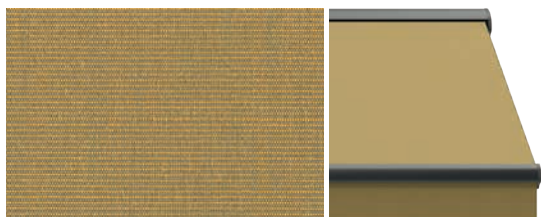


0034

UV: 99%

GTOT: 6.3%

*Until stock lasts

CURRY

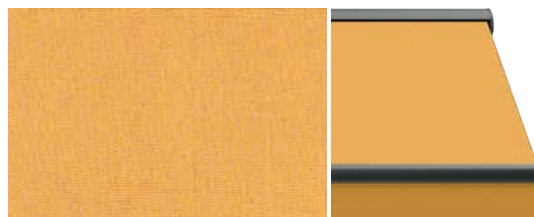


U105

UV: 100%

GTOT: 12%

OCRE

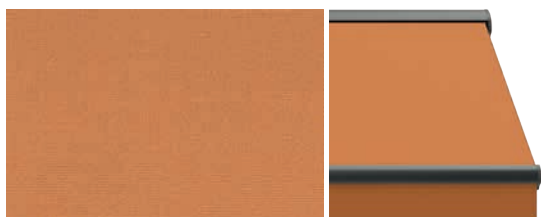


2180

UV: 99%

GTOT: 13%

POTIRON PIGUE

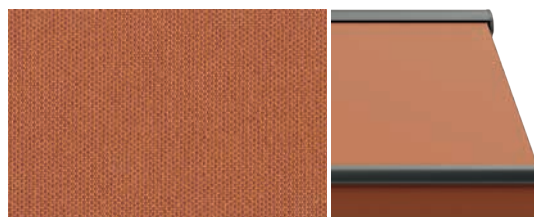


U413

UV: 100%

GTOT: 10%

JADE

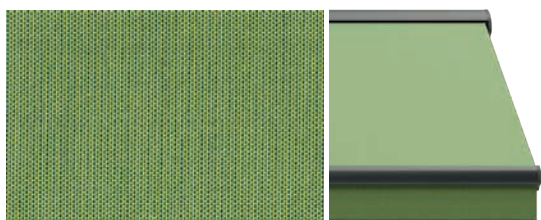

0396

UV: 99%

GTOT: 8.12%

MELEZE PIGUE*




U417

UV: 100%

GTOT: 8%

*Until stock lasts

VERDE BOTELLA

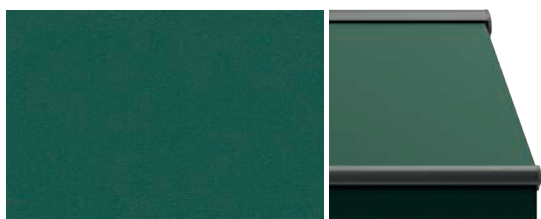

2245


UV: 99%

GTOT: 6%

WATERPROOF

ACRYLIC FABRICS

BLANCO

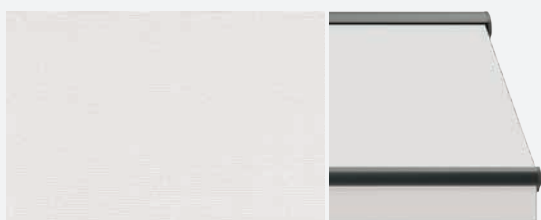


8268

UV: 97%

GTOT: 18%

MARFIL

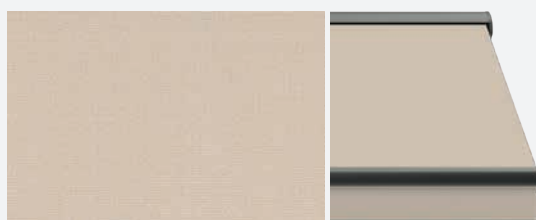

8272

UV: 97%

GTOT: 16%

AMARILLO




8265

UV: 99%

GTOT: 15%

COCO

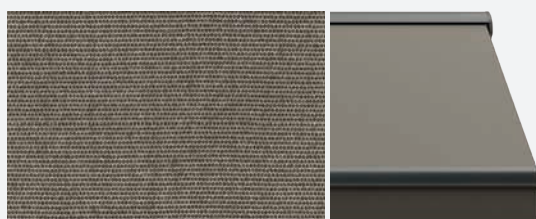

2047

UV: 99%

GTOT: 9%

GRIS




8271

UV: 99%

GTOT: 7%

ANTRACITA

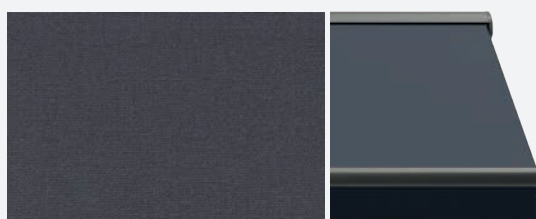


2796

UV: 99%

GTOT: 6%

TWEED NEGRO

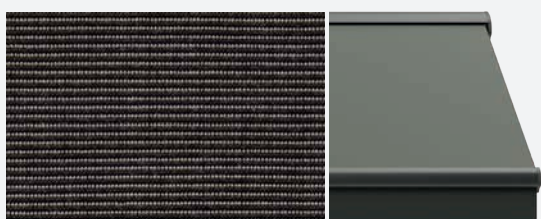


2085

UV: 99%

GTOT: 6%

NEGRO

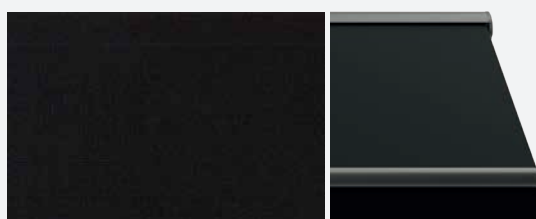

8275


UV: 99%

GTOT: 5%

ORCHESTRA


ACRYLIC FABRICS

NAPLES LINEN

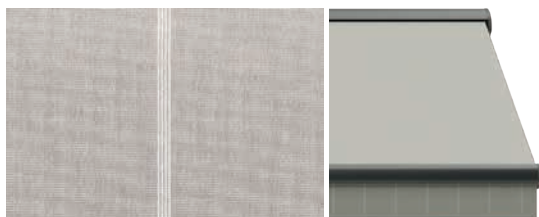


D307 UV: 95% GTOT: 13% RAPPORT: 20 cm

NAPLES HEATHER

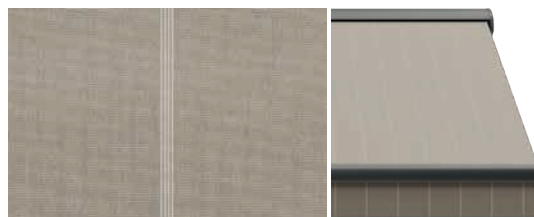


D305 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES LIGHT GREY

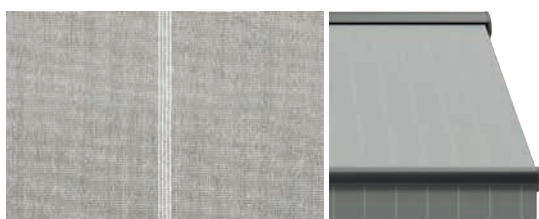


D304 UV: 90% GTOT: 11% RAPPORT: 20 cm

NAPLES STONE

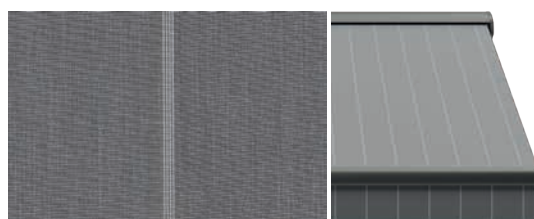

D113 UV: 95% GTOT: 7% RAPPORT: 20 cm


PENCIL BEIGE*

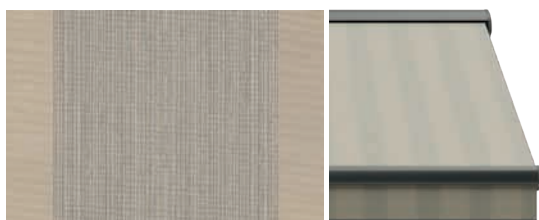

D324 UV: 95% GTOT: 14% RAPPORT: 30 cm


*Until stock lasts

PENCIL YELLOW

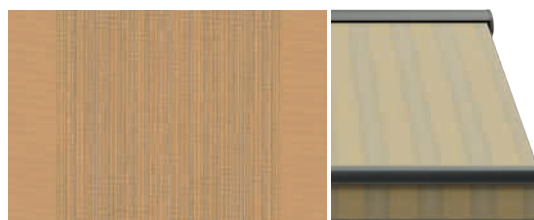

D323 UV: 95% GTOT: 13% RAPPORT: 30 cm


PENCIL GREY*

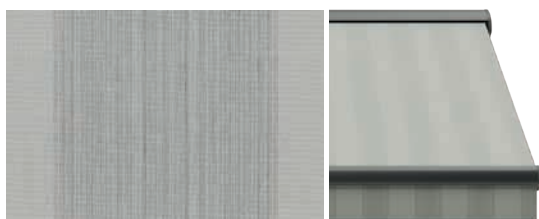

D320 UV: 95% GTOT: 14% RAPPORT: 30 cm


*Until stock lasts

PENCIL DARK GREY

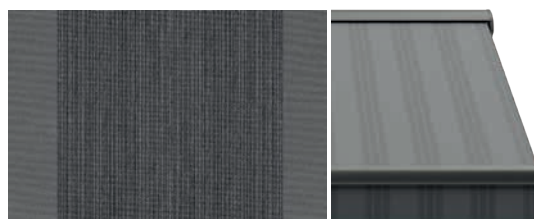

D319 UV: 100% GTOT: 8% RAPPORT: 30 cm


WIDE CHINE YELLOW*

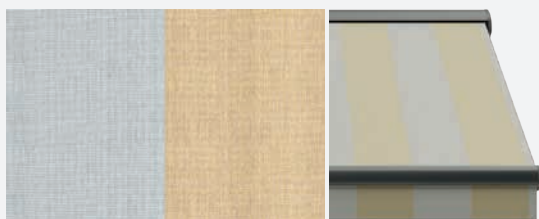

D300 UV: 95% GTOT: 13% RAPPORT: 60 cm

*Until stock lasts


WIDE CHINE BEIGE*

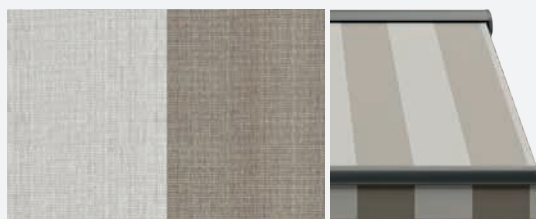

D301 UV: 95% GTOT: 12% RAPPORT: 60 cm

*Until stock lasts

WIDE CHINE GREEN*

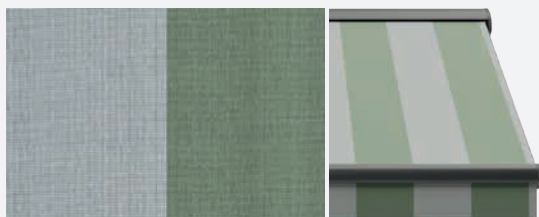


D299 UV: 95% GTOT: 10% RAPPORT: 60 cm

*Until stock lasts

URBAN


ACRYLIC FABRICS

CANDLELIGHT

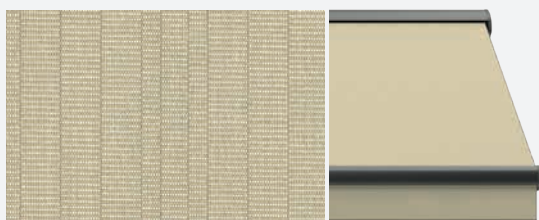

0990 UV: 99% GTOT: 14% RAPPORT: 6 cm

LANTERN

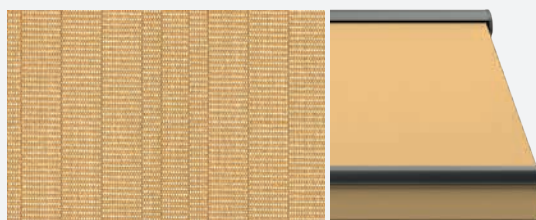

0991 UV: 99% GTOT: 14.2% RAPPORT: 6 cm

CONCRETE



0993 UV: 99% GTOT: 10.8% RAPPORT: 6 cm

TIMBER




0992 UV: 99% GTOT: 9.6% RAPPORT: 6 cm

LANDSCAPE MINI

ACRYLIC FABRICS

CLAY

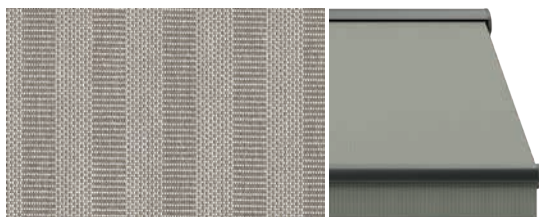


4627 UV: 99% GTOT: 11.3% RAPPORT: 2 cm

SAND



4620 UV: 99% GTOT: 11.4% RAPPORT: 2 cm

GRAVEL

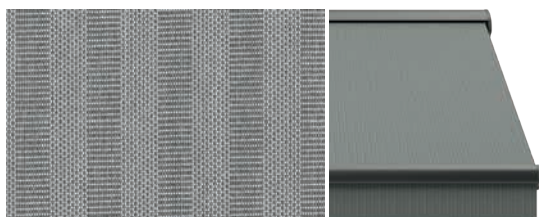

4621 UV: 99% GTOT: 8.1% RAPPORT: 2 cm

LAVA




4623 UV: 99% GTOT: 8.3% RAPPORT: 2 cm

LANDSCAPE


ACRYLIC FABRICS

ROSOPSIDA

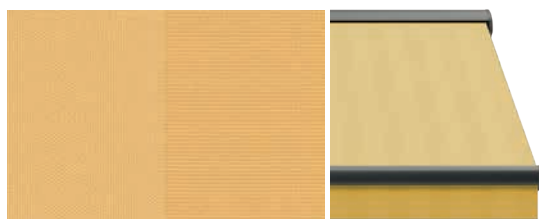

4657 UV: 99% GTOT: 14.96% RAPPORT: 24 cm

GOBI

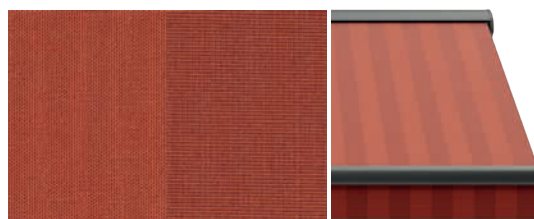

4658 UV: 99% GTOT: 11.32% RAPPORT: 24 cm

BEACH



4662 UV: 99% G_{TOT}: 16.37% RAPPORT: 24 cm

SAHARA DUST



4639 UV: 99% G_{TOT}: 10.18% RAPPORT: 24 cm

CLIFFS




4643 UV: 99% G_{TOT}: 6.78% RAPPORT: 24 cm

LADAKH




4655 UV: 99% G_{TOT}: 5.91% RAPPORT: 24 cm

FJORD

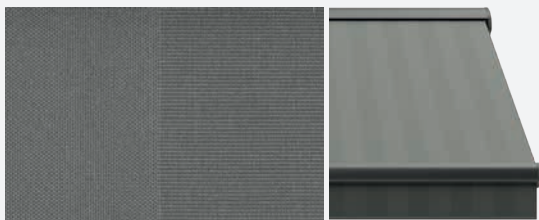

4644 UV: 99% G_{TOT}: 7.8% RAPPORT: 24 cm

NAMIB

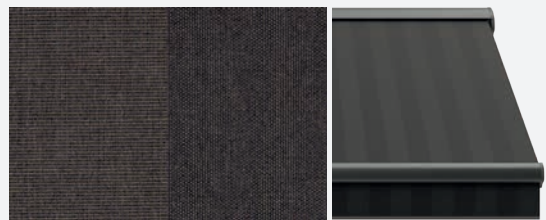

4640 UV: 99% G_{TOT}: 5.04% RAPPORT: 24 cm

VULCANO



4665 UV: 99% G_{TOT}: 5% RAPPORT: 24 cm

CLASSICAL


ACRYLIC FABRICS

CLASSICAL GRIS




2103 UV: 97% GTOT: 16% RAPPORT: 20 cm

CLASSICAL AMARILLO

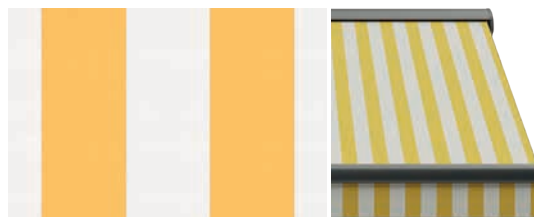


2015 UV: 97% GTOT: 15% RAPPORT: 20 cm

CLASSICAL MOSSY TWEED

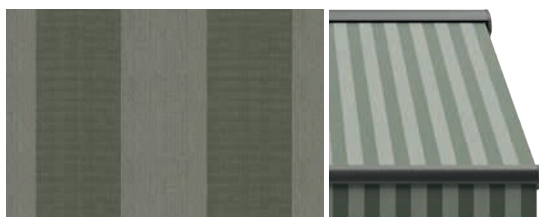


9878 UV: 98% GTOT: 15% RAPPORT: 20 cm

CLASSICAL BEIGE

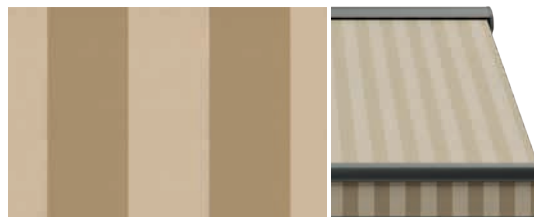

2275 UV: 98% GTOT: 14% RAPPORT: 20 cm

CLASSICAL MARRON-BEIGE

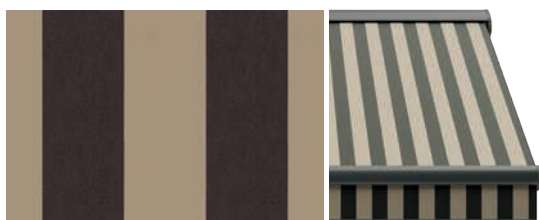


2148 UV: 99% GTOT: 9% RAPPORT: 20 cm

FANTASY


ACRYLIC FABRICS

MILANO

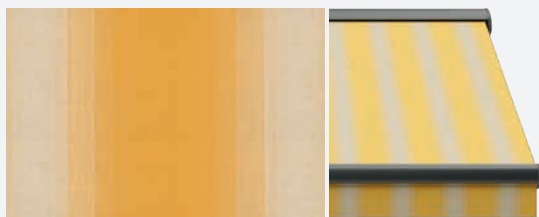

3868 UV: 95% GTOT: 22% RAPPORT: 30 cm

CALGARY

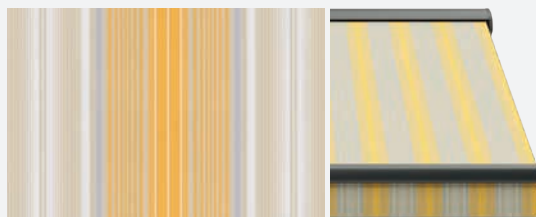

6712 UV: 95% GTOT: 16% RAPPORT: 30 cm

SUNRISE




0180 UV: 99% GTOT: 14.73% RAPPORT: 30 cm

PALERMO




3605 UV: 90% GTOT: 21% RAPPORT: 17 cm

ARGENTINA

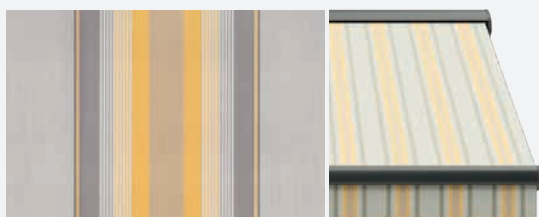


2016 UV: 98% GTOT: 15% RAPPORT: 30 cm

TARANTO

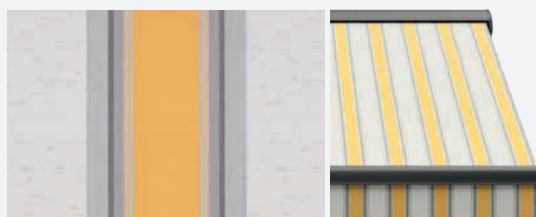


3672 UV: 95% GTOT: 21% RAPPORT: 24 cm

CANBERRA

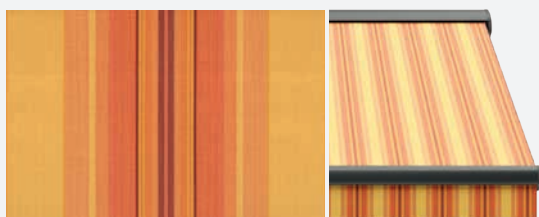


0452 UV: 98.75% GTOT: 15.51% RAPPORT: 24 cm

DAKAR

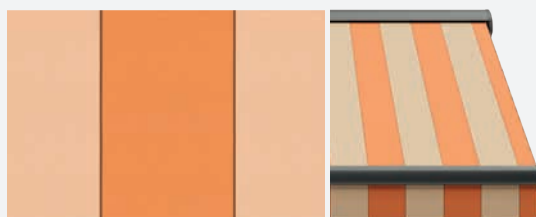

2080 UV: 98% GTOT: 15% RAPPORT: 40 cm


LISBONNE NATURE*

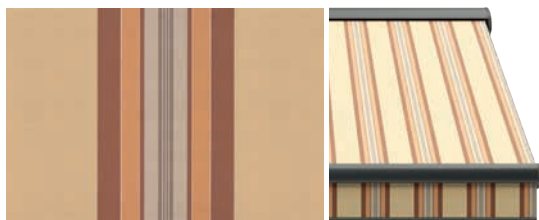

8224 UV: 95% GTOT: 13% RAPPORT: 30 cm


*Until stock lasts

SALERNO

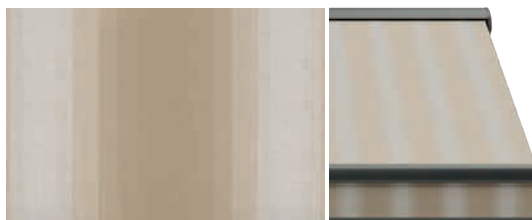


3861 UV: 90% GTOT: 20% RAPPORT: 30 cm

ALBERTA

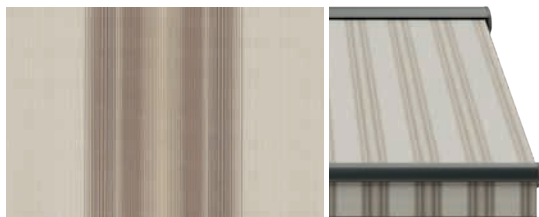


5106 UV: 98% GTOT: 15% RAPPORT: 30 cm

MANCHESTER

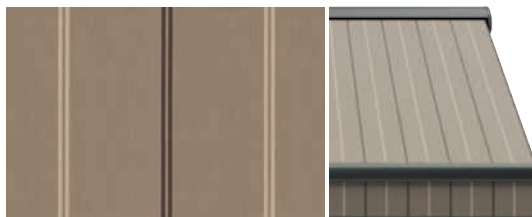


2823 UV: 98% GTOT: 8% RAPPORT: 24 cm

HARDELOT NATURE

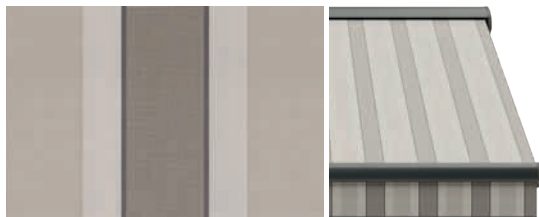

8935 UV: 95% GTOT: 14% RAPPORT: 30 cm

SIENNE NATURE

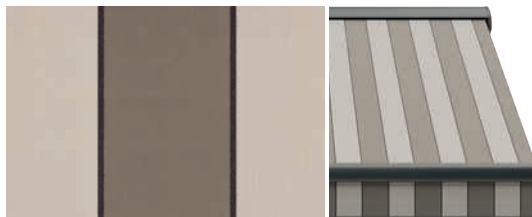


D100 UV: 95% GTOT: 14% RAPPORT: 30 cm

TEXAS




2238 UV: 98% GTOT: 13% RAPPORT: 30 cm

PERU

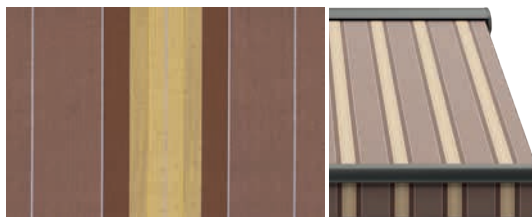


2201 UV: 98% GTOT: 14% RAPPORT: 30 cm

ANDRIA

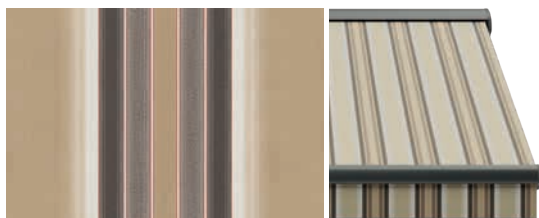


3881 UV: 95% GTOT: 18% RAPPORT: 30 cm

MARTE

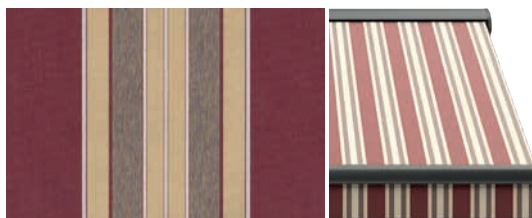


2121 UV: 99% GTOT: 11% RAPPORT: 24 cm

BOLOGNA

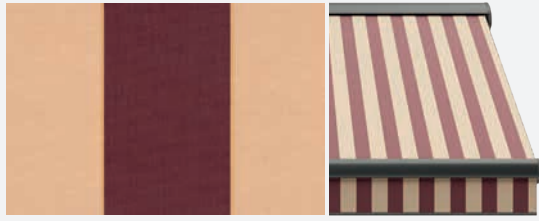


3427 UV: 90% G_{TOT}: 22% RAPPORT: 20 cm

JAMAICA

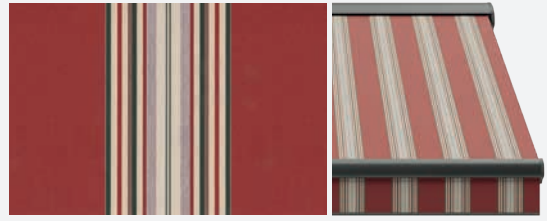

2701 UV: 98% G_{TOT}: 14% RAPPORT: 30 cm

BRISBANE

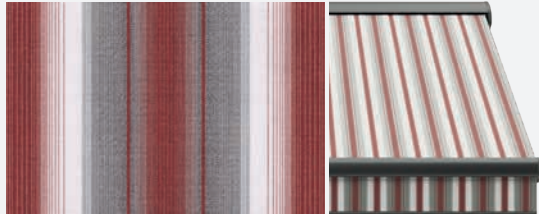


0186 UV: 98.1% G_{TOT}: 10.26% RAPPORT: 24 cm

EDMONTON



6711 UV: 98% G_{TOT}: 13% RAPPORT: 30 cm

OSLO FIRE*

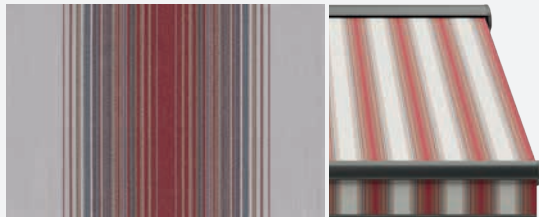

7351 UV: 95% G_{TOT}: 14% RAPPORT: 30 cm

WINTONE




0734 UV: 97.5% G_{TOT}: 12.39% RAPPORT: 24 cm

FOGGIA




3864 UV: 95% G_{TOT}: 18% RAPPORT: 30 cm

BROKEN HILL

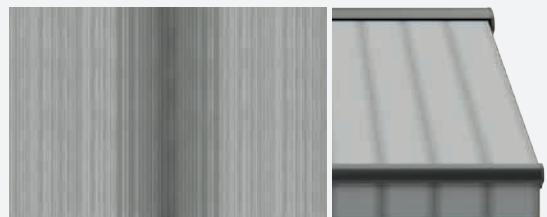


0497 UV: 95% G_{TOT}: 16% RAPPORT: 30 cm

NEW YORK

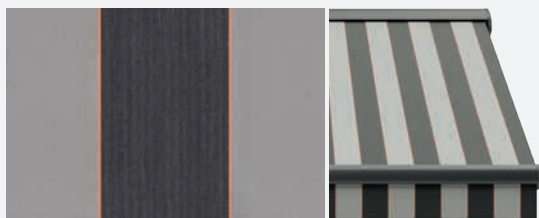


2174 UV: 98% G_{TOT}: 14% RAPPORT: 30 cm

METROPOLITAN

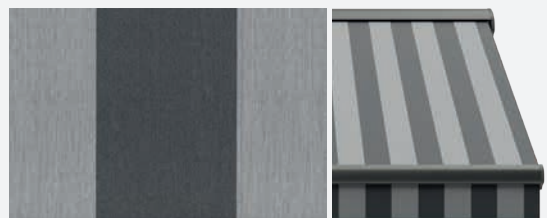

3608 UV: 99% G_{TOT}: 7% RAPPORT: 30 cm

GLADSTONE

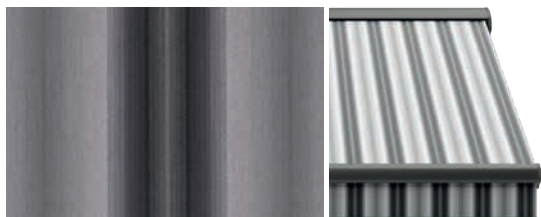


0493 UV: 99% GTOT: 7.78% RAPPORT: 24 cm

SIENNE STONE




8931 UV: 95% GTOT: 13% RAPPORT: 30 cm

PLUTON

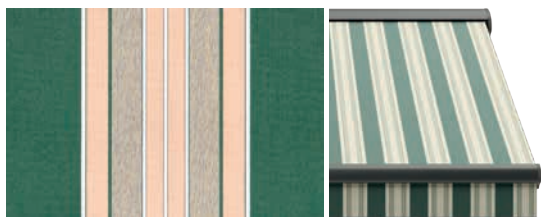


2179 UV: 99% GTOT: 10% RAPPORT: 24 cm

RAVENNA

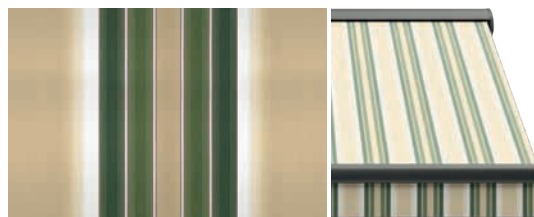


3882 UV: 95% GTOT: 18% RAPPORT: 30 cm

FIRENZE

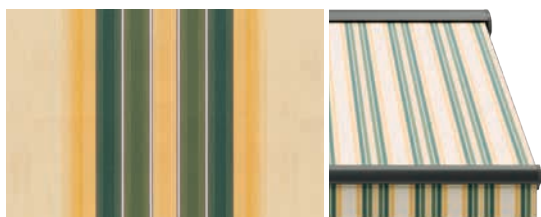


3889 UV: 90% GTOT: 20% RAPPORT: 30 cm

MELBOURNE

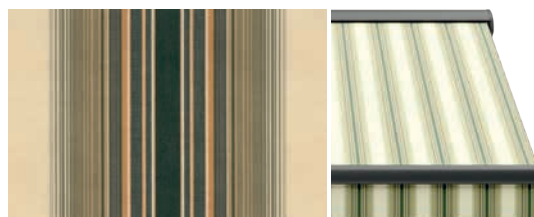

0054 UV: 99% GTOT: 11.74% RAPPORT: 24 cm

ORLANDO

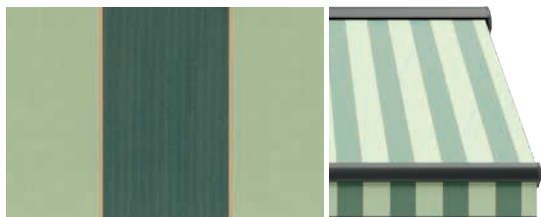


2191 UV: 98% GTOT: 11% RAPPORT: 30 cm

CANADA



2061 UV: 99% GTOT: 8% RAPPORT: 30 cm

PADOVA

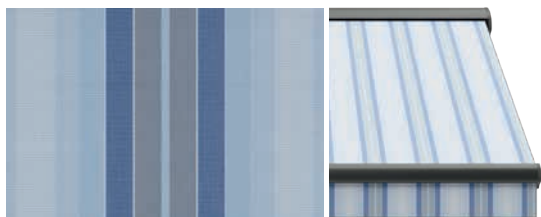

3875 UV: 95% GTOT: 17% RAPPORT: 30 cm


ANCONA



3746 UV: 90% GTOT: 19% RAPPORT: 24 cm

FABRIC RAPPORT

ACRYLIC FABRICS

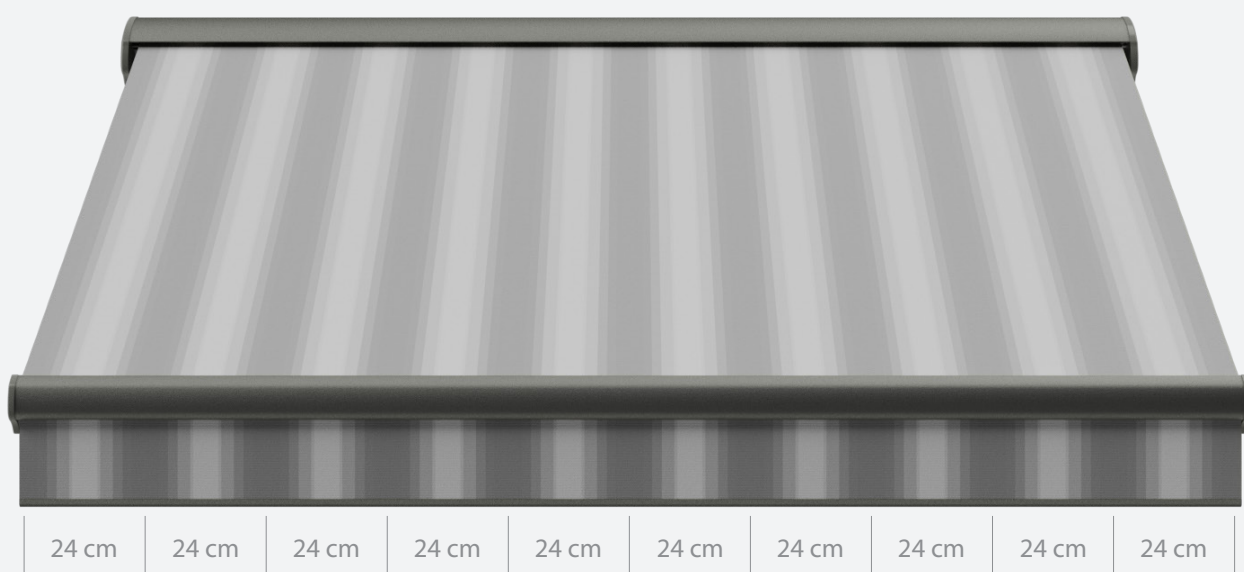


Multiply repeated pattern of fabric,
expressed in cm and given in the chart.





SCREEN FABRICS

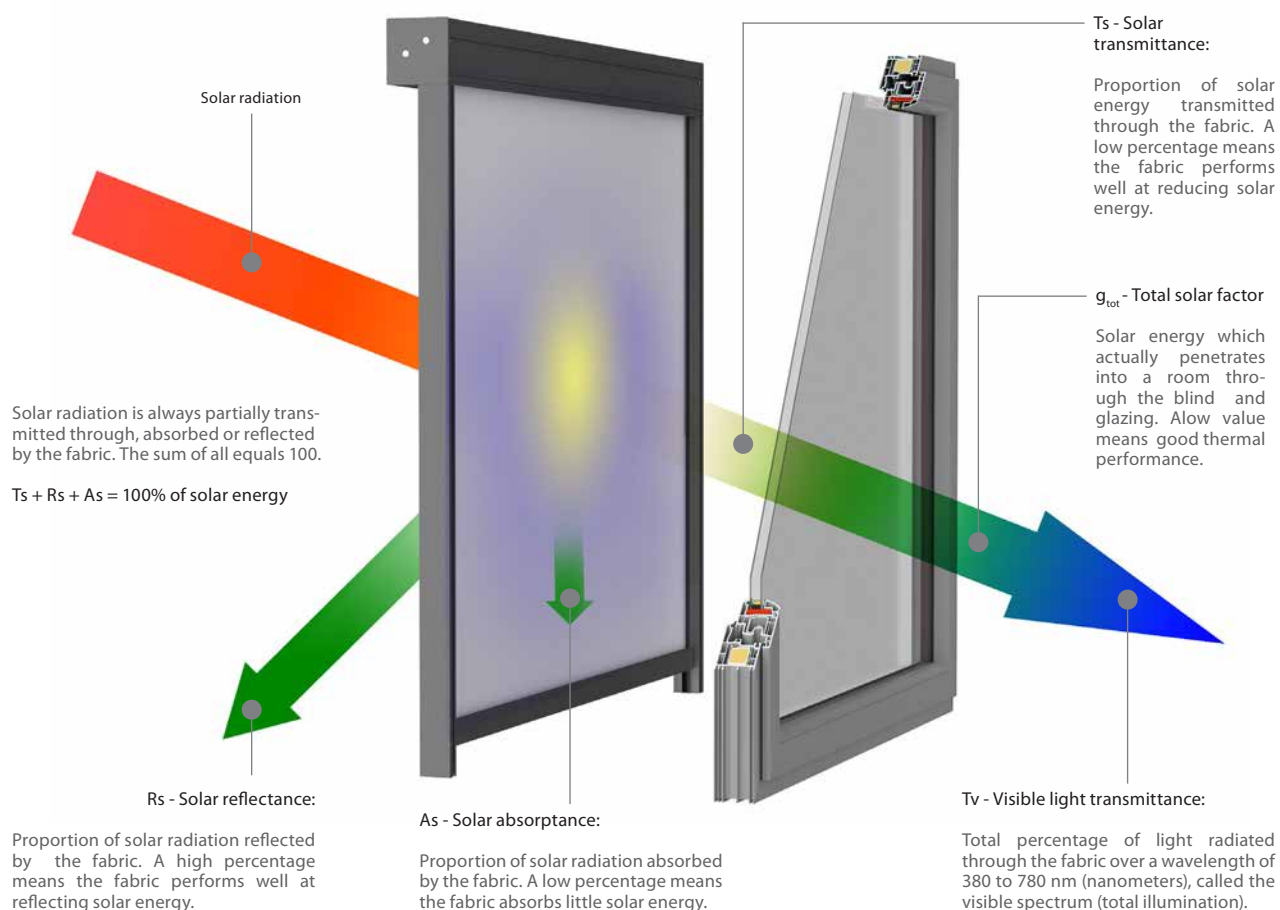

OPENNES FACTOR:

Relative area of the openings in the fabric. It is considered as independent of the colour.
For fabric with the same weave, it should be measured using the darkest colour in the range.

SERGE 1 % / SERGE 600

Collection of fabrics made from fiberglass covered with PVC. Fabrics made of this group have a distinctive diagonal „serge” weave, which guarantees them an unusual dimensional stability. High fire resistance and very good technical parameters of fabrics provide users with visual comfort in rooms, thus protecting against overheating the interior.

POLYSCREEN

Wide group of technical polyester fabrics coated with PVC, characterized by variety of weaving patterns and properties (PS Luminous, PS 550, PS 350). This allows architects to select the right solution, increasing visual attractiveness of the building and to emphasize its individual character. High technical parameters provide optical and thermal comfort inside the room. An additional feature of the fabric is the ease to keep it clean.

BLACK OUT

High-end blackout fabrics (Serge 600 BO Lunar, Polyscreen 314 BO) effectively block sunlight coming into the room. It is ideal solution for conference rooms, audio-visual, photographic studios, etc. High dimensional stability, high technical parameters and interesting colours are without a doubt advantages of fabrics in this group.

SUNWORKER


Smooth polyester fabric finished with PVC. Unique structure of the fabric effectively stops the sunlight, allowing for just optimal amount of visible light to transmit inside the room, providing high comfort to its users. The advantages of this fabric are: color fastness, high resistance to weather conditions and easy to maintain clean.

SOLTIS 92 / SOLTIS 99

Polyester technical fabric coated with PVC, manufactured with patented technology Precontraint Ferrari®. The unique technology gives fabric high stability and protects it against deformations even in large size blinds. High technical parameters guarantee optical and thermal comfort. The quality components used in production of this fabric ensures color fastness. Thanks to the smooth surface, the fabric is difficult to absorb dirt or get stained.


ACOUSTIC - VEROGLIM

Elegant fabric, made from the highest quality non-flammable polyester fibers Trevira® CS, intended for indoor use. Because of its weight, the fabric is ideally suited for cassette systems. An important advantage of this fabric is high coefficient of acoustics. Thanks to its structure, the fabric absorbs sound and mutes the room. Another advantage is metallic surface that reflects bright light and in this way regulates its intensity in the room.

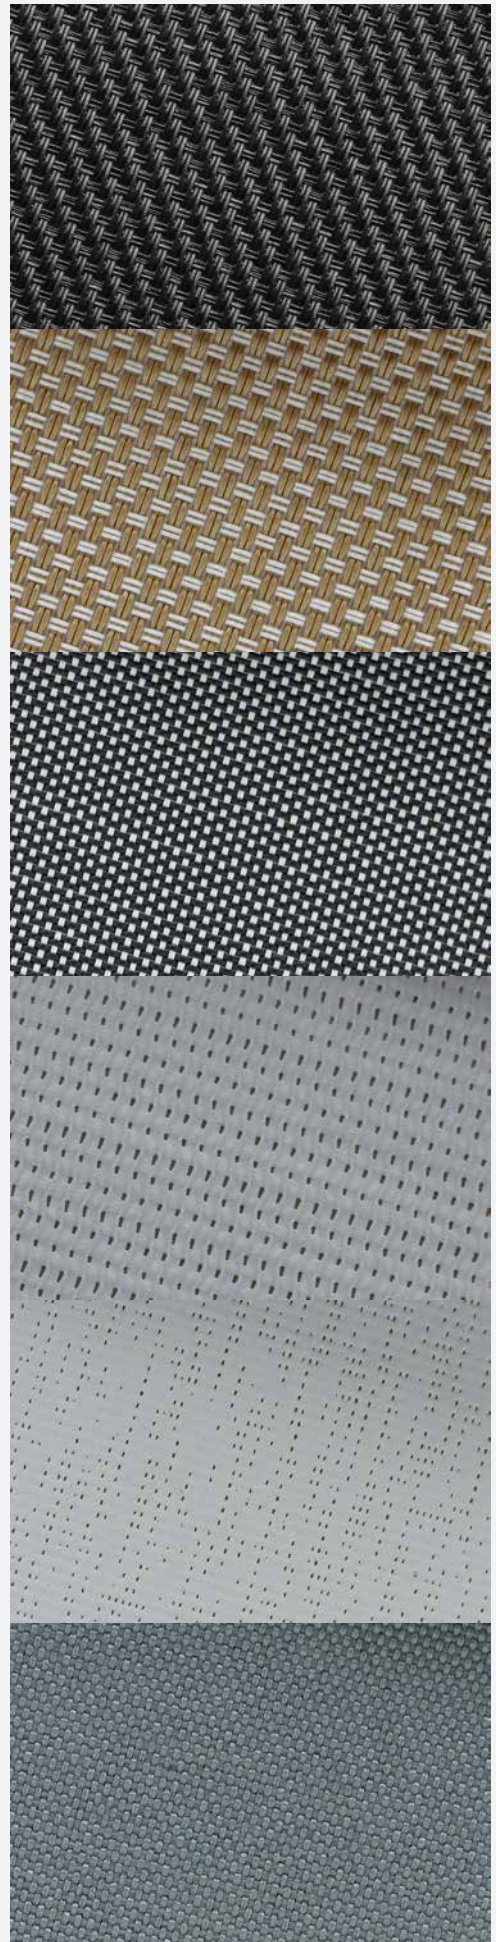


SERGE 600

WHITE - WHITE

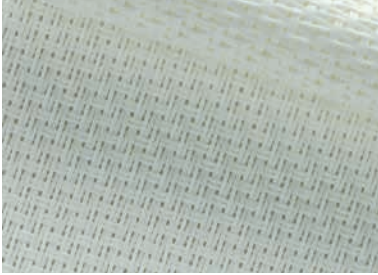


60002002

GREY - WHITE

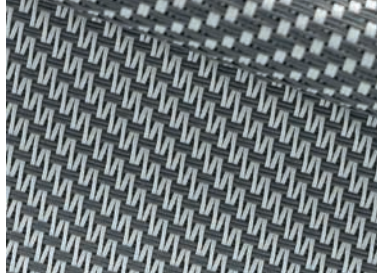

60001002

PEARL - GREY

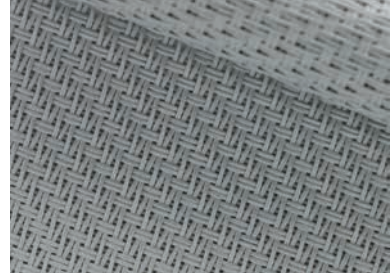


60007007

GREY - GREY



60001001

GREY - CHARCOAL

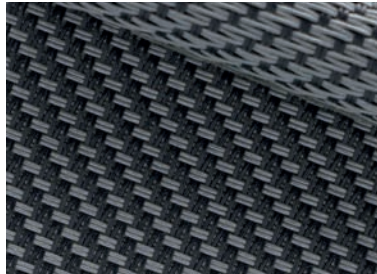

60001010


CHARCOAL - CHARCOAL



60010010


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	42% glasfibre + 58% pvc	525	0.74	>7	5	21/21	65.9/66.3	13.2/12.7	21.2/21.2	interior / exterior
Grey - White						6.7/6.7	37.2/26.9	56.2/66.4	6.6/6.6	
Pearl - Grey						10.1/10.1	38.3/39.4	51.7/50.5	8.4/8.4	
Grey - Grey						3.5/3.5	15.1/15.1	81.3/81.4	3.6/3.6	
Grey - Charcoal						3.6/3.6	9.9/12.6	86.5/83.8	3.6/3.6	
Charcoal - Charcoal						3.6/3.6	5.0/4.8	91.4/91.6	3.6/3.6	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225 Certificates - ask for availability										

SERGE 600



SERGE 600

PURE BLACK

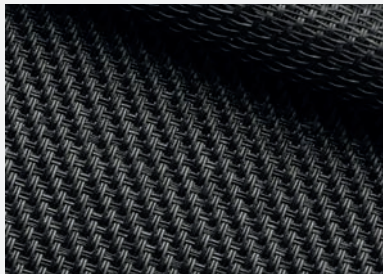


60030030

CHARCOAL - BRONZE




60010011

SANDSTONE

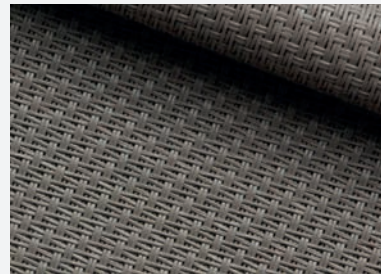


60033033

GREY - SAND

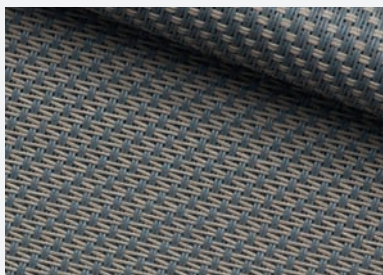


60001003

LINEN - LINEN

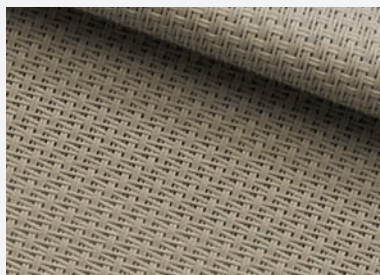

60008008

LINEN - WITE

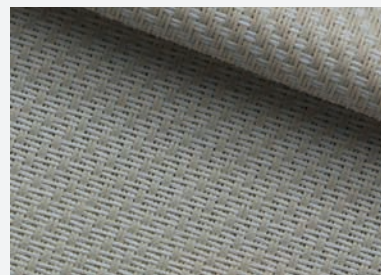

60008002

	composition	weight [g/m ²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Pure Black	42% glasfibre + 58% pvc	525	0.74	>7	5	5.9	3.7	90.4	5.9	interior / exterior
Charcoal - Bronze						6.1	6.5/6.0	87.4/87.9	6.1	
Sandstone						7.1	20.4/20.5	72.4/72.5	6.8	
Grey - Sand						4.7	26.5/21.5	68.8/73.8	4.5	
Linen - Linen						14.9	52.5/52.7	32.5/32.4	12.9	
Linen - White						15.5	58.2/56.4	26.4/28.1	13.7	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 7.5										
Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 260, Weft: 225										
Certificates - ask for availability										

SERGE 600



SERGE 1%

WHITE - WHITE




61002002

GREY - WHITE



61001002

PEARL - GREY

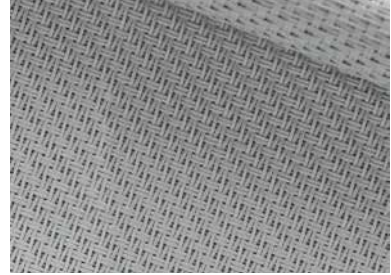

61007007

GREY - GREY



61001001

GREY - CHARCOAL



61001010

CHARCOAL - CHARCOAL



61010010

BRONZE - BRONZE




61011011

LINEN - LINEN



61008008

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02 EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	42% glasfibre + 58% pvc	638	0.78	>7	1	12.8	71.3	15.9	12.9	interior / exterior
Grey - White						2.2	44.8/31.2	53/66.6	2	
Pearl - Grey						2.8	36.9	60.3	2.1	
Grey - Grey						2.4	17.4	80.2	2.2	
Grey - Charcoal						1.2	10.5/14	88.3/84.8	1.2	
Charcoal - Charcoal						1.1	5.9	93	1.1	
Bronze - Bronze						1.4	8.6	90	1.3	
Linen - Linen						5.9	54.2	39.9	3.7	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 5.9, Weft: 6.2										
Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 321, Weft: 277										
Certificates - ask for availability										



SERGE 600

BO LUNAR

WHITE - WHITE



6BO002002

WHITE - PERL GREY




6BO002007

PEARL GREY - PEARL GREY




6BO007007

WHITE - GREY

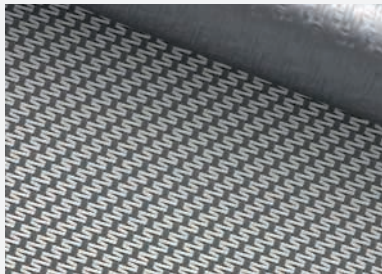


6BO001002

OYSTER SHELL

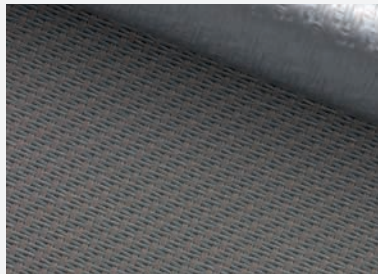


6BO033001

GREY - GREY

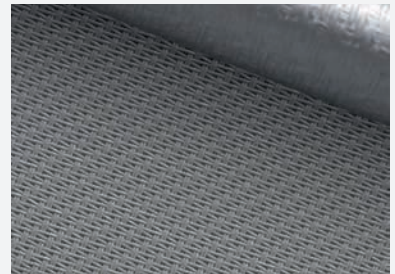

6BO001001

GREY - CHARCOAL

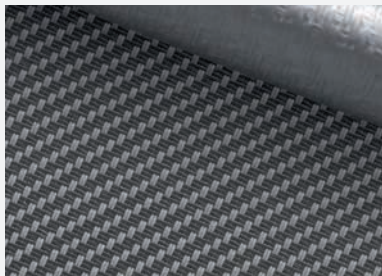

6BO001010

CHARCOAL - CHARCOAL



6BO010010

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White - White	33% GLASFIBRE 47% PVC 20% PVC LAMINATE	678	0.73	>7	0	0	68.8/33.7	31.2/66.3	0	interior / exterior
White - Perl Grey						0	47.8/33.2	52.2/66.8	0	
Pearl Grey - Pearl Grey						0	35.5/34	64.5/66	0	
White - Grey						0	40.3/33.7	59.7/66.3	0	
Oyster Shell						0	18.2/33.4	81.8/66.6	0	
Grey - Grey						0	17.2/33.1	82.8/66.9	0	
Grey - Charcoal						0	11/33.7	89/66.3	0	
Charcoal - Charcoal						0	6.2/33.4	93.8/66.6	0	
Tearing resistance (daN) UNE EN ISO 4674-1 method 2 - Warp: 8.5, Weft: 9 Breaking strength (daN/5cm) UNE EN ISO 1421 - Warp: 224.2, Weft: 176.6 Certificates - ask for availability										

SERGE 600 BO LUNAR

SERGE 600 BO LUNAR



POLYSCREEN® 550

ASH (EBONY - GREY)



10550017

PEARL - GREY




10550013

WHITE - GREY




10550012

WHITE - PEARL

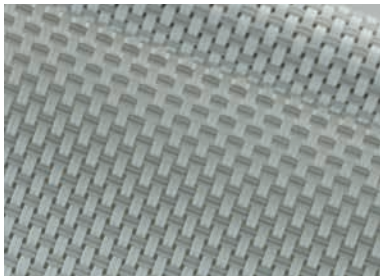


10550011

PEARL - SAND

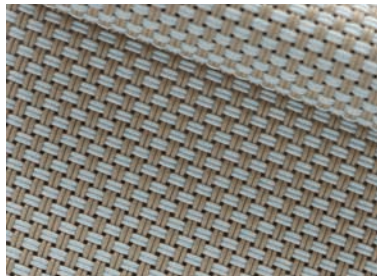

10550023

PEARL - LINEN

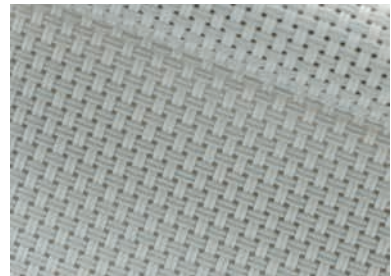

10550021

WHITE - LINEN



10550019

WHITE



10550009

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
						5	TS [%]	RS [%]	AS [%]	TV [%]	interior / exterior
Ash (Ebony - Grey)	85% PVC + 15% PES	610 ± 5%	0,78 ± 5%	8/8	5/5		6	7	87	6	
Pearl - Grey				8/8	5/5		11	29	60	9	
White - Grey				≥7/8	≥ 4/5		13	37	50	12	
White - Pearl				≥7/8	≥ 4/5		16	57	27	12	
Pearl - Sand				8/8	5/5		14	36	50	10	
Pearl - Linen				8/8	5/5		17	46	37	12	
White - Linen				≥7/8	≥ 4/5		20	63	17	16	
White				7/8	4/5		19	69	12	15	
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 6,6, Weft: 5,3 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 174, Weft: 133 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 22%, Weft: 21% Certificates - ask for availability											

POLYSCREEN® 550

POLYSCREEN® 550



POLYSCREEN® 550


GOLD & SILVER

EBONY - GOLD



10550051

LINEN - GOLD

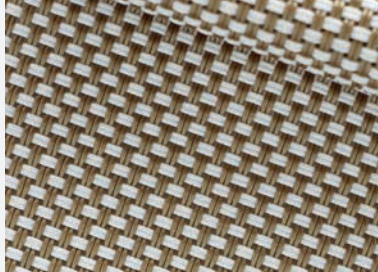


10550053

BRONZE - SILVER




10550041

GREY - SILVER

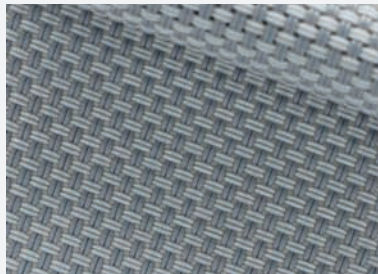

10550042

SILVER VISION

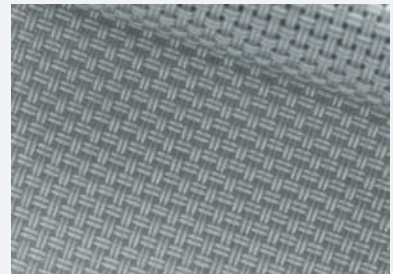

10550043

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Gold	85% PVC + 15% PES	610 ± 5%	0.78	8/8	5/5	5	11	8	81	10	interior / exterior
Linen - Gold							13	25	62	14	
Bronze - Silver							17	14	69	17	
Grey - Silver							16	17	67	17	
Silver Vision							21	23	56	22	
* On request Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6,6 , Weft 5,3 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133 Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22 , Weft 21 Certificates - ask for availability											

POLYSCREEN® 550 GOLD & SILVER


POLYSCREEN® 550 GOLD & SILVER



0338


POLYSCREEN® 350

ASH (EBONY - GREY)

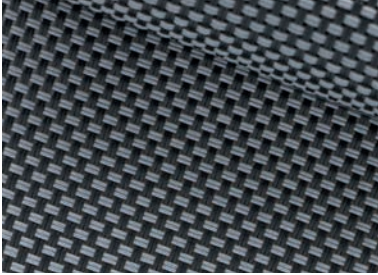

10550017

PEARL - GREY

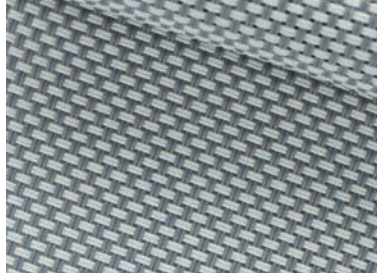


10550013

WHITE - LINEN



10350019

WHITE

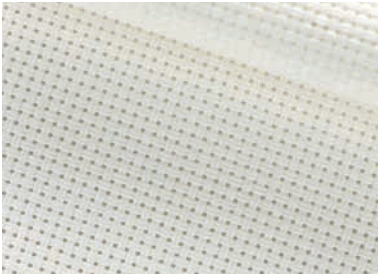

10350009

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Ash (Ebony - Grey)	75% PVC + 25% PES	400 ± 5%	0.53 ± 5%	8/8	5/5	10	10	8	82	10	Interior
Pearl - Grey				8/8	5/5		16	26	58	14	
White - Linen				≥7/8	≥ 4/5		27	58	15	23	
White				7/8	4/5		25	64	11	22	
Tearing resistance (daN) UNE EN ISO 13937-3:2001- Warp: 4.9, Weft: 4.7 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 153, Weft: 136 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 20%, Weft: 24% Certificates - ask for availability											

POLYSCREEN® 350

POLYSCREEN® 350



0338

POLYSCREEN®

LUMINOUS

ARIZONA



10550061

SAHARA A




10550062

SAHARA B




10550062

ATACAMA

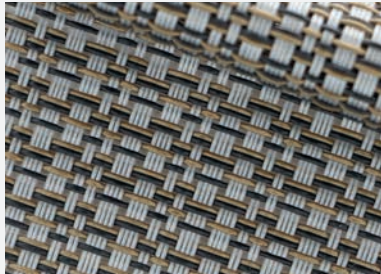

10550065

MOJAVE

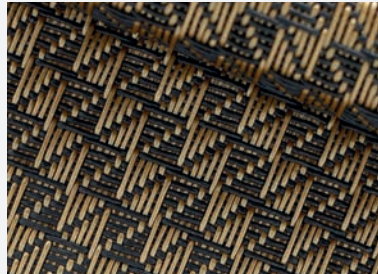

10550066


	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Arizona	PES 85% PVC + 15% PVC	511 ± 5%	0.78	8/8	5/5	13	15	10	75	16	interior / exterior
Sahara A		612 ± 5%	0.82			6	10	15	75	11	
Sahara B		612 ± 5%	0.82			6	10	12	78	10	
Atacama		594 ± 5%	0.77			10	20	14	66	22	
Mojave		516 ± 5%	0.90			11	14	8	78	14	
Tearing resistance (daN) - On request Breaking strength (daN/5cm) - On request Stretch (%) UNE EN ISO 13934-1:1999 - On request											

POLYSCREEN® LUMINOUS

POLYSCREEN® 550


COUPAGE

COUPAGE 1

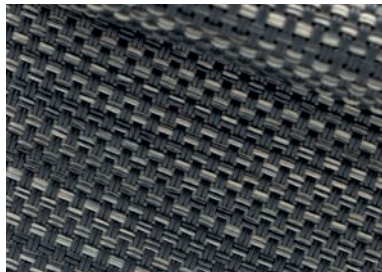


10550031

COUPAGE 2

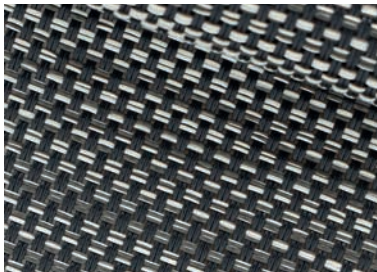


10550032

COUPAGE 3

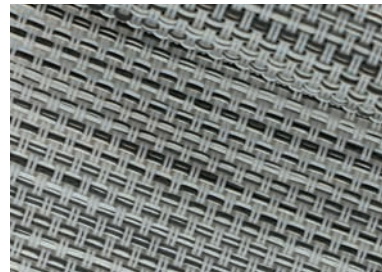

10550033

COUPAGE 4

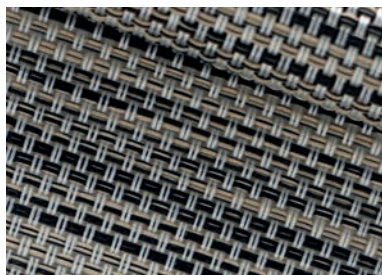

10550034

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	internal method				application
							TS [%]	RS [%]	AS [%]	TV [%]	
Coupage 1	85% PVC + 15% PES	610 ± 5%	0.78	8/8	5/5	5	*	*	*	10	interior / exterior
Coupage 2							*	*	*	12	
Coupage 3							*	*	*	19	
Coupage 4							*	*	*	17	
* On request Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp 6.6 , Weft 5.3 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp 174, Weft 133 Stretch (%) UNE EN ISO 13934-1:1999 - Warp 22, Weft 21 Certificates - ask for availability											

POLYSCREEN® 550 COUPAGE

POLYSCREEN® 550 COUPAGE




0338

POLYSCREEN® 314


BLACK OUT

EBONY - GREY

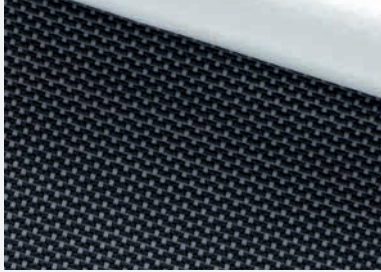


10314B20

EBONY - LINEN

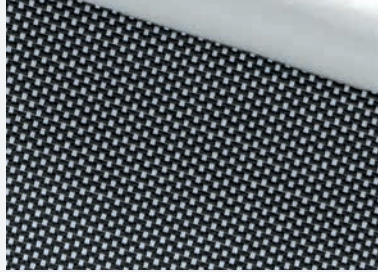


10314B08

LINEN - BRONZE

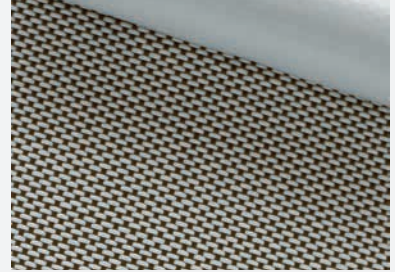


10314B06

WHITE

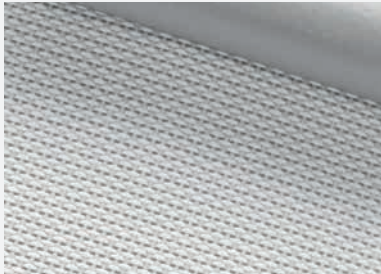


10314B02

LINEN - SAND

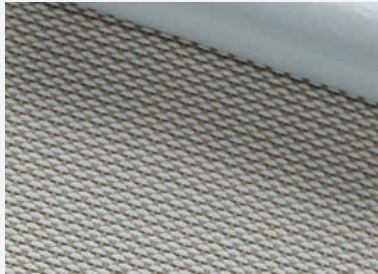

10314B04

EBONY - SAND

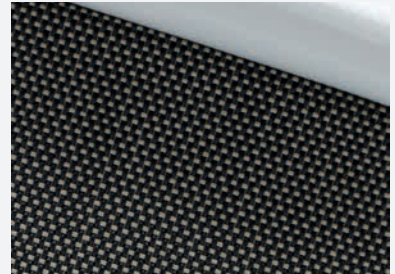

10314B10

		composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 4892	openness factor [%]	EN 14501				application
								TS [%]	RS [%]	AS [%]	TV [%]	
Ebony - Grey	80% PVC + 20% PES coated with PVC	610 ± 5%	0.66 ± 5%	8 / 8	4/5	0	0	0	36	64	0	Interior
Ebony - Linen				8 / 8								
Linen - Bronze				8 / 8								
White				7 / 8								
Linen - Sand				8 / 8								
Ebony - Sand				8 / 8								
Tearing resistance (daN) UNE EN ISO 13937-3:2001 - Warp: 4.4, Weft: 2.5 Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 147, Weft: 91 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 26.7%, Weft: 17.6% Certificates - ask for availability												
POLYSCREEN® 314 BLACK OUT												



0338


SUNWORKER

WHITE



40SWK005

IRON

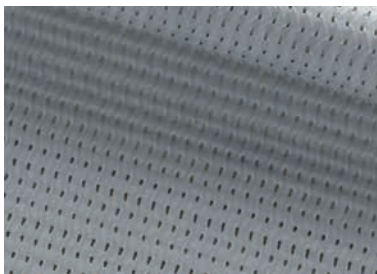

40SWK653

CHAMPAGNE



40SWK711

CHARCOAL



40SWK392


		composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
								TS [%]	RS [%]	AS [%]	TV [%]	
White	Polyester / PVC	300	0.42	7/8	4-5/5	6	23	66	11	21	interior / exterior	
Iron						6	12	35	53	10		
Champagne						6	21	50	29	18		
Charcoal						6	6	7	87	6		
Tearing strength (daN/5cm) DIN 53363 - Warp: 70, Weft: 35 Tensile strength (daN/5cm) NF EN ISO 13934-1 - Warp: 220, Weft: 150 Certificates - ask for availability												

SUNWORKER




SOLTIS® 92

DEEP BLACK

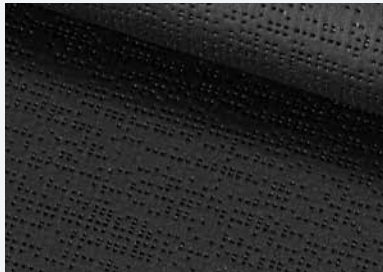


509251176

CHARCOAL

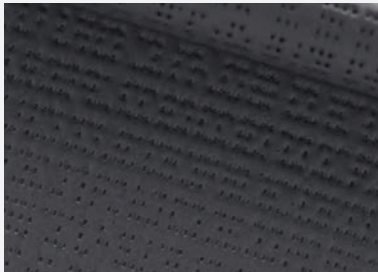


50922047

CONCRETE

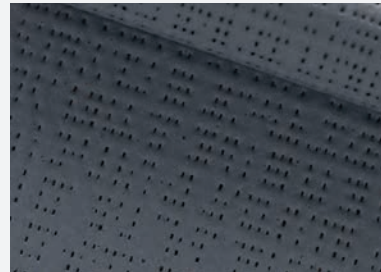


50922167

SILVER

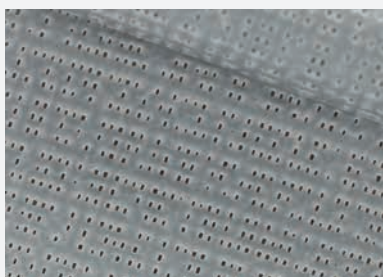


50922048

SILVER BLACK

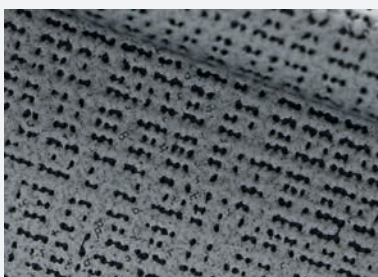

50922045

SILVER - WHITE

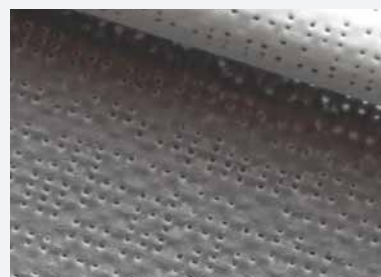

50922051

SANDY BEIGE



50922135

WHITE



50922044


	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Deep Black	Polyester / PVC	420	0.45	5/5	4	3	5	92	3	interior / exterior
Charcoal				5/5		5	8	87	5	
Concrete				4/5		6	19	75	5	
Silver				4/5		8	46	46	8	
Silver Black				5/5		4	35	61	4	
Silver - White				4/5, 3-4/5		12/12	49/70	39/18	11/11	
Sandy Beige				5/5		11	46	43	8	
White				2/5		19	68	13	17	
Tear strength (daN) DIN 53.363 - Warp: 45, Weft: 20 Tensile strength (daN/5cm) EN ISO 1421 - Warp: 310, Weft: 210 Certificates - ask for availability										

SOLTIS® 92



SOLTIS® 99

WHITE

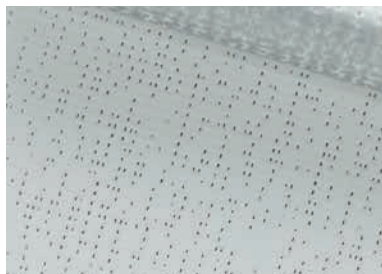

50992055

QUARTZ



509950285

SANDY BEIGE




509950286

SPUME




509950284

LIGHT GREY

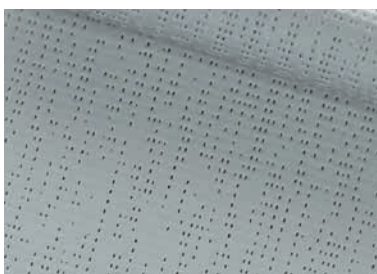


50992058

ALU

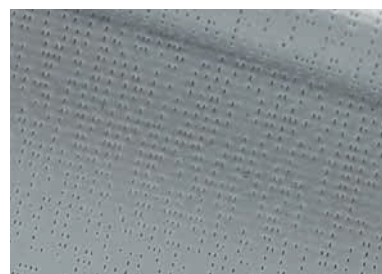

50992059

ANTRACITE

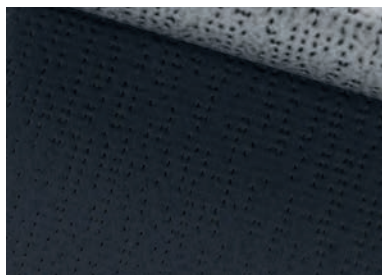

50992068

	composition	weight [g/m²]	thickness [mm]	light fastness grey scale level EN ISO 105 B04	openness factor [%]	EN 14501				application
						TS [%]	RS [%]	AS [%]	TV [%]	
White	Polyester / PVC	290	0.32	5/5, 3- 4/5	3	14/14	47/63	39/23	13	interior
Quartz				5/5, 5/5		11/11	47/60	42/29	9	
Sandy Beige				5/5, 5/5		10/10	43/44	47/46	7	
Spume				5/5, 4-5/5		12/12	47/60	41/28	9	
Light Grey				5/5, 5/5		8/8	44/43	48/49	6	
Alu				5/5, 5/5		6	43	51	5	
Antracite				5/5, 5/5		3/3	33/8	64/89	3	
Tear strength (daN) DIN 53.363 - Warp: 11, Weft: 13 Tensile strength (daN/5cm) EN ISO 1421 - Warp: 160, Weft: 170 Certificates - ask for availability										


SOLTIS® 99



VEROGLIM


ACOUSTIC

GREY - SILVER

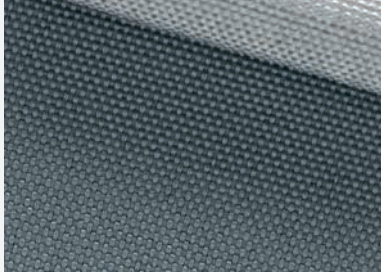


34022115

LIGHT GREY - SILVER

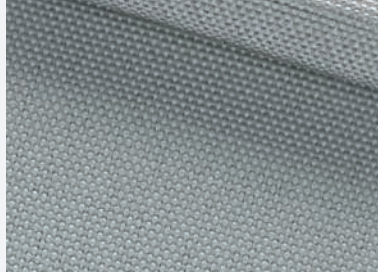


34022114

WHITE - SILVER

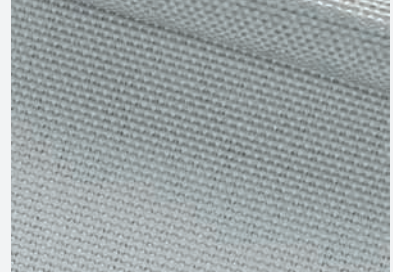

34022111

IVORY - SILVER

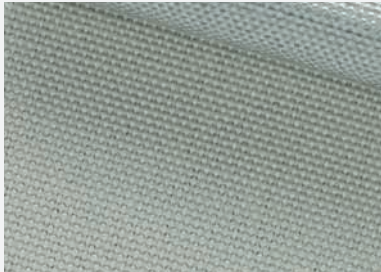

34022113

	composition	weight [g/m²]	thickness [mm]	light fastness blue scale level EN ISO 105 B02	openness factor [%]	DIN EN 410				application
						TS [%]	RS [%]	AS [%]	TV [%]	
Grey - Silver	Trevira CS	220	0.43	5-6/8	1	5	50	45	2	interior
Light Grey - Silver						5	52	43	4	
White - Silver						7	52	41	7	
Ivory - Silver						6	49	45	6	
Breaking strength (daN/5cm) UNE EN ISO 13934-1:1999 - Warp: 95, Weft:130 Stretch (%) UNE EN ISO 13934-1:1999 - Warp: 35%, Weft: 23% Certificates - ask for availability										

VEROGLIM ACOUSTIC



$\alpha_w = 60\%$



PERGOLA SOLID FABRICS




PRECONTRAIT 602 OPAQUE

Technical specifications

	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	750 g/m ²	EN ISO 2286-2
Width	267 cm	-
Tensile strength (warp/weft)	230/220 daN/5cm	EN ISO 1421
Tear strenght (warp/weft)	20/20 daN	DIN 53.363
Elongation under load (warp/weft)	<1%/<1%	NF EN 15619
Adhesion	9/9 daN/5cm	EN ISO 2411
Finish	Varnish both sides	-
Flame retardancy	• M2/NFP 92-507 • B1/DIN4102-1 • M2/UNE23.727-90 • BS 7837 • 1530.3/AS NZS • Method 2/NFPA 701 • CSFM T19 •	
Cold resistance	-30°C	ISO 4675
Heat resistance	+70°C	

BLANC 602N OPAQUE 8503

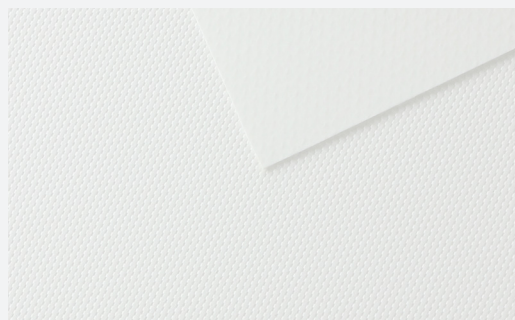

BEIGE 602N OPAQUE 0020




PRECONTRAIT 702 OPAQUE

Technical specifications


	Values	Standards
Yarn	1100 dtex PES HT	Tersuisse
Weight	830 g/m ²	EN ISO 2286-2
Width	267 cm	
Tensile strength (warp/weft)	280/280 daN/5 cm	EN ISO 1421
Tear strength (warp/weft)	30/28 daN	DIN 53.363
Adhesion	10/10 daN/5 cm	EN ISO 2411
Finish	Acrylic varnish both sides Aluminium face / Back grey	
Flame retardancy	M2/NFP 92-507 • TEST 2/NFPA 701 • CSFM T19 • B1/DIN 4102-1 • BS 7837 • GROUP 1/AS/ NZS 3837 • 1530.3/AS/NZS • SITAC/SIS 650082 • Schwerbrennbar Q1-Tr1/ONORM A 3800-1 • CLASSE 2/UNI 9177-87 • M2/UNE 23.727-90 • VKF 5.2/SN 198898 • B-s2,do/EN 13501-1	
Cold resistance	-30°C	
Heat resistance	+70°C	

ALU GREY 702 OPAQUE 1285

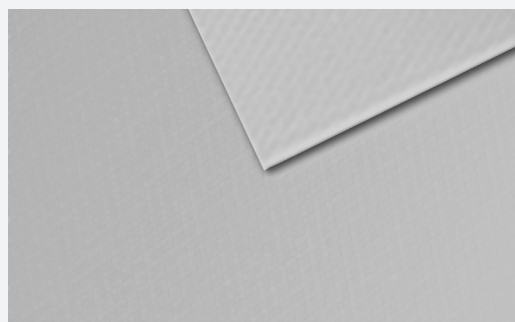

SELT COLOURS

COATING FINISH

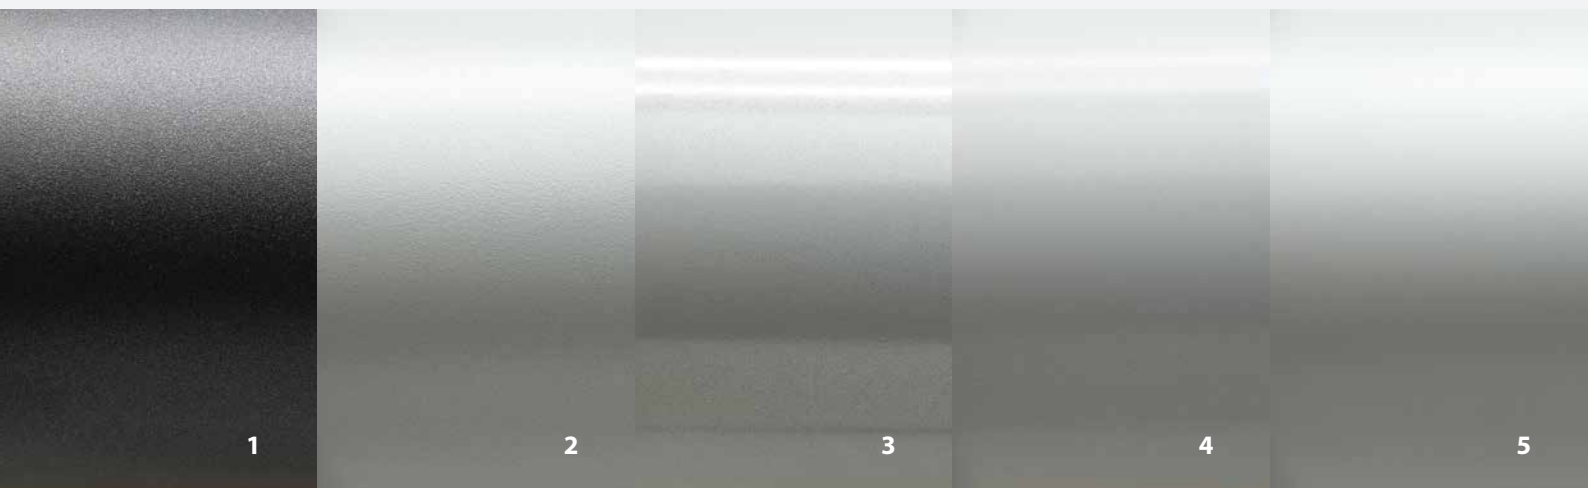

1. *"fine structure - pearl mat"*
2. *"fine structure"*
3. *satın finish*
4. *mat finish*
5. *"artificial anode"*

CONSTRUCTION COLOURS

Presented colour chart shows colours available within Selt collection for powder coated construction elements of Refleksols, venetian blinds and sunbreakers. Conditions of painting in colours included in the collection below and in other RAL colours – according to rules described in price lists of individual products. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint.

SLATS COLOURS


Presented colour chart shows slat colours available within SELT collection. Conditions of painting in colours within Selt collection and other RAL colours – according to rules described in price list of venetian blinds. Because of technical and production reasons as well as due to different coating techniques, differences in colours between product components are possible. Presented pictures are for illustration purposes only. Colours may vary from actual ones. Any difference in shade does not constitute grounds for complaint. Customized perforation (layout and size of openings) and painting in colours outside of SELT collection are subject to individual arrangements in terms of price and conditions of implementation.



SLAT COLOURS

C50 / C80 / C80F / Z90

RAL 1013



C80 / Z90

RAL 7012



C80 / Z90

RAL 7016



C50 / C80 / C80F / Z90

RAL 7021



C80 / Z90

RAL 7024



C80 / Z90

RAL 7035



C80 / Z90

RAL 8014



C80 / Z90

RAL 9005*



C80 / Z90

RAL 9006




C50 / C80 / C80F / Z90

RAL 9007




C50 / C80 / C80F / Z90

RAL 9010



C50 / C80 / C80F / Z90

RAL 9016



C80

DB 703



C80 / Z90

VSR 240*



C80 / Z90

VSR 780*



C80 / Z90


Standard slat gloss 80% (satin)

* gloss 60% (semi-matt)

SLAT COLOURS


C50 SLIM

0005 (~ RAL 1013)



C50 SLIM

0204 (~ RAL 9003)



C50 SLIM

0030



C50 SLIM

0038 (~ RAL 9006)




C50 SLIM

9007 (~ RAL 9007)



C50 SLIM

2901

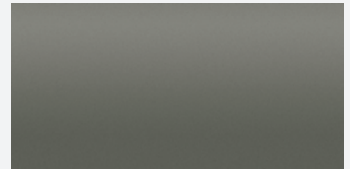


C50 SLIM

0199 (~ RAL 7024)



C50 SLIM

0019 (~ RAL 9011)




C50 SLIM

0204 PF (~ RAL 9003)



C50 SLIM

0038 PF (~ RAL 9006)




C50 SLIM


CONSTRUCTION

COLOURS

RAL 1013 MAT



RAL 1015 MAT



RAL 7001 MAT



RAL 7012 MAT



RAL 7015 MAT



RAL 7016 MAT



RAL 7021 MAT




RAL 7022 MAT



RAL 7024 MAT



RAL 7035 MAT



RAL 7037 MAT



RAL 7039 MAT



RAL 7043 MAT



RAL 8003 MAT





RAL 8014 MAT





CONSTRUCTION

COLOURS


RAL 8016 MAT



RAL 9001 MAT




RAL 9005 MAT




RAL 9006 MAT





RAL 9007 MAT




RAL 9010 MAT




RAL 9016 MAT





DB 703 MAT





VSR 240 SATIN



VRS 780 MAT



FSM 71319 MAT





SELT

COMPANY

All specifications, design and color of products are up to date at time of forwarding this catalogue to print. The manufacturer reserves the right to make changes without prior notice. Due to the printing process any color reproductions are for illustration purposes only, their deviation from the actual color cannot constitute grounds for complaint. Folder reproduction in whole or in part is forbidden without the written permission of SELT.

selt.com