



Operation type	MIN	MAX	M A X	
Chain	30	700	450	8,0

System colour



white



The table price includes a vertical blind with a rounded white headrail, without fabric/PVC louvres, with clip holders, runners, traverse by cord, tilt by chain.




Sloping headrails are made after prior consultation. The headrail set consists of: louvre carrier, louvre tensioner, bottom chain.



Slight differences in colour and in the patterns of fabrics and blind components are permissible.

To avoid damaging the blind mechanism, turn the louvres with the chain only up to the point where a firm stop is felt.

Headrail sizes



rounded headrail

Runners



Replaceable catches

Headrail holders

clip holder
(standard)clip holder for
suspended ceilings


Cord weight




Adjustable projection



80/120



95/155




Adjustable louvre height



The height of each louvre can be adjusted by hand. The fabric is inserted into a special holder and fixed with a rod; surplus fabric can be cut off.

Holders are available in white only. The option is not recommended with Berlin fabric.

Production version - slope

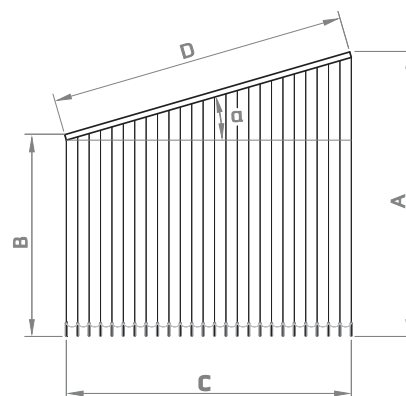

The order must state distances A, B and C. Maximum angle $\alpha = 45^\circ$
 $\frac{A-B}{C} \leq 1,19$
 Parameters affecting system size: maximum fabric length and weight depend on the slope angle.
 In the standard system, to prevent the fabric dropping by itself, a cord tensioner is fitted as standard (available in white and nickel only).

How to calculate stack weight?



To find out whether a configuration exceeds the maximum load for a given operation, add the fabric weight and the weight bar weight.

Area [m²] * fabric weight [kg/m²] * 1.15

127 mm




89 mm

Number of louvres * 0.040 kg

Number of louvres * 0.032 kg

Angle α	Maximum system width C [cm]	
	89 mm	127 mm
0° - 5°	525	700
5° - 10°	520	610
10° - 15°	480	570
15° - 20°	450	530
20° - 25°	400	470
25° - 30°	360	420
30° - 35°	330	390
35° - 40°	300	350
40° - 45°	270	320
45° - 50°	240	280

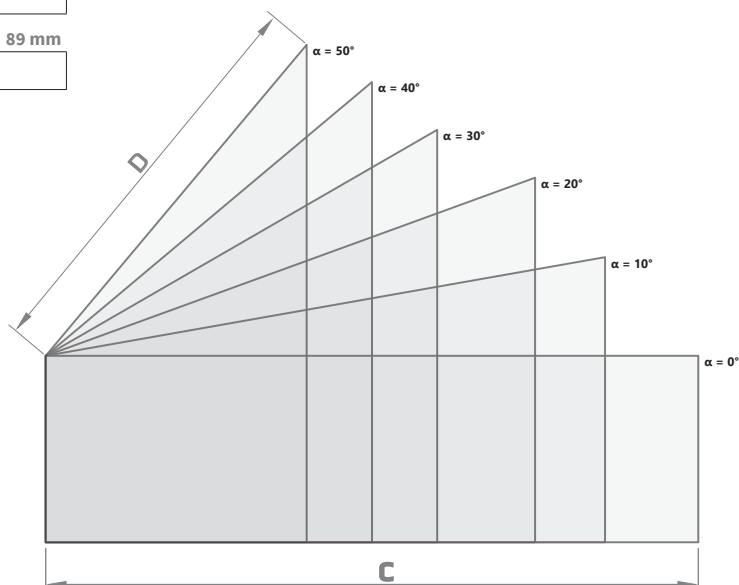



- adjustable projection 80/120 white
- adjustable projection 80/120 grey/black
- adjustable projection 95/155 white
- adjustable projection 95/155 grey/black
- clip holder for suspended ceilings (white only) louvre heat-welding (pcs.)
- adjustable louvre height (pcs.)

Approximate number of louvres *

width 89	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450	475	500	525	550	575
mm	7	10	13	16	20	22	25	30	32	34	37	40	45	48	50	57	60	61	64	70	68	71
127 mm	5	7	9	11	13	15	18	20	22	24	26	28	30	32	35	39	41	43	44	46	47	51

* This quantity is used for a preliminary estimate of the load on the operation and may differ from the actual number of louvres / runners in a given order.

